


# Aluminum Profile for Strip Lights



## HB-XT-1213A

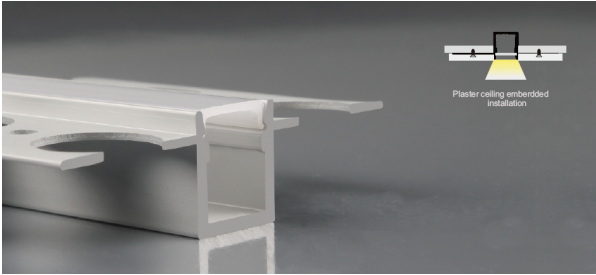

### Key Features

- Trimless design for seamless, flush installation in drywall
- Wide flange (52.1mm) ensures clean transitions and firm integration into walls/ceilings
- Suitable for LED strips up to 8mm wide
- Made from high-quality 6063-T5 aluminum for excellent heat dissipation
- Milky white diffuser for smooth, dot-free light output
- Ideal for continuous lighting lines or architectural accents


### Application:

- Designed for drywall recessed installation in ceilings or walls
- Perfect for minimalist and modern interiors needing invisible light sources
- Widely used in residential, hotel, office, and retail environments
- Suitable for accent lighting, indirect lighting, and linear design features



Specifications	
Models	HB-XT-1213A
Dimensions:	52.1mm (W) × 13.4mm (H)-(2.05" × 0.53")
Material:	High-quality 6063-T5 anodized aluminum
Inner Channel Width:	9.6 mm (fits LED strips ≤ 8 mm)
Lighting Direction:	Top View
Operating Temperature:	-20°C to +50°C (-4°F to +122°F)
Compatible LED	SMD 2835 / COB LED Strips
LED Strip width	5mm - 8mm
Diffuser Cover:	Milky White
Beam Angle:	120°
Mounting Options:	Trimless recessed installation for drywall ceilings or walls (mud-in type)
Lengths	3000mm (9.84 feet)

### Dimensions

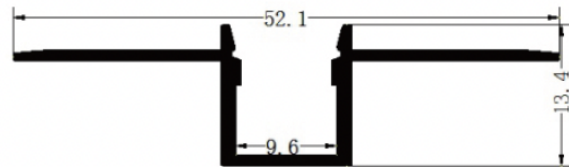

### Accessories



End Caps

### Ordering Guide

Example: HB-XT-1213A

Series	Type	Size	Length
HB Aluminum Profile	XT	1213A	3 Meter