

# 12" Tunable LED Slim Surface




## Key Features


- Super slim design - 5/8" thick
- Easy to install on standard j-box with rotating in mounting bracket
- Use in damp location
- Adjusting the color temperature from (2700K, 3000K, 3500K, 4000K, 5000K) with slide switch located in the backplate
- 120V operation with TRIAC/ELV dimming
- Edge-lit technology to produce a smooth uniform lighting effect
- Driver-on-board technology eliminates the demand of a traditional LED driver

Specifications	
Models	HB-SS12R24W5CCTWH
Applications	Residential/commercial/office
Wattage	24W
Color Temperature(K)	5CCT 2700K/3000K/3500K/4000K/5000K
Lumen Output(lm)	1800
Halogen Equivalent	80W
Beam Angle	120°
CRI	90
Driver Input	120V AC
Power Factor	0.9
Dimming	TRIAC dimmers 100%-10%
Approved Location*	Insulated ceiling, Indoor & Damp location
Ambient Temperature	-20°C to +40°C
Air Tight	Yes
Projected Life	70% light output at 50,000 hours
Certification	ETL
Warranty*	5-year

## Dimensions

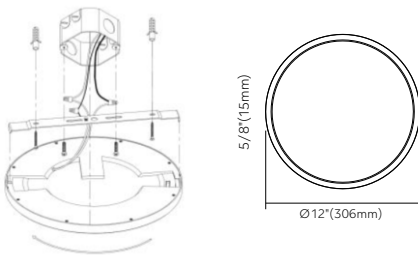

## Accessories



Mounting Screw  
x 2PCS



Wire Connector  
x 3PCS

## Ordering Guide

Series	Wattage	Color Temperature	Voltage	Finish
HB-SS12R LED Slim Surface -12" Round	24W	5CCT (2700K/3000K/3500K/4000K/5000K)	(Blank) 120V only	● WH (White)

\* Other finish are available, please contact our sales to make order for special items