




12" Tunable LED Slim Surface



Key Features


- **Construction:** die-cast aluminum frame with white acrylic lens
- **Mounting:** easy to install on standard J-box with a quick snap
- **3CCT:** adjusting the color temperature from(3000K, 3500K, 4000K) with slide switch located in the backplate
- **Triac Dimmable**
- Edge-lit technology to produce a smooth uniform lighting effect
- Driver-on-board technology eliminates the demand of a traditional LED driver
- LED source SDCM<5

Dimensions

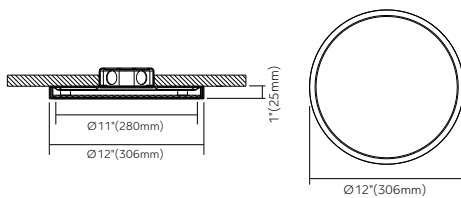


Specifications	
Models	HB-SS12R
Applications	Residential/commercial/office
Wattage	22W
Color Temperature(K)	3CCT 3000/3500/4000
Delivered Lumen(lm)	1600
Halogen Equivalent	140W
Beam Angle	120°
CRI	>90
Driver Input	120V AC
Power Factor	0.9
Dimming	TRIAC dimmers 100%-20%
Approved Location*	Insulated ceiling, Indoor & Wet location
Ambient Temperature	-20°C to +40°C
Air Tight	Yes
Projected Life	70% light output at 50, 000 hours
Certification	cETLus
Warranty*	5-year

* Due to continuous improvements and innovations, specifications may change without notice

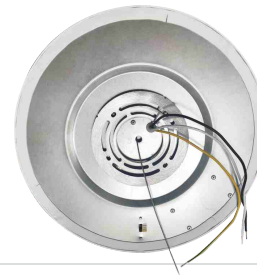

Accessories



Mounting Screw
x 2PCS



Wire Connector
x 3PCS

Ordering Guide

Example: HB-SS12R22WCCTWH

Series	Wattage	Color Temperature	Voltage	Finish
HB-SS12R LED Slim Surface -12" Round	22W	3CCT (3000K/3500K/4000K)	(Blank) 120V only	● WH (White)

* Other finish are available, please contact our sales to make order for special items