

LED Gimbal Recessed Lights


2" Round



Key Features

- 2" round LED recessed gimbal with integral driver in connection box
- Eyeball, round & square models
- Type IC rated-no housing needed
- Superior LED performance and lifespan
- 30° tilting, 360° rotation
- Cut hole in ceiling and snap fixture in opening with attached spring clips
- Aluminum construction

Dimensions

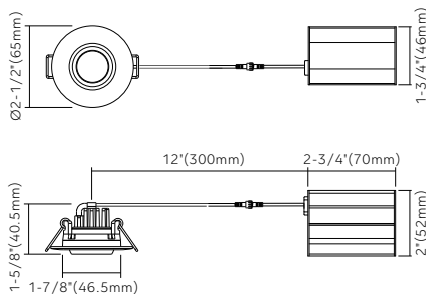

Ordering Guide

Series	Wattage	Color Temperature	Voltage	Finish
HB-GR2R	5W	3000K/4000K	(Blank) 120V only	● WH (White)

Example: HB-GR2R5W5CCTWH

* Other finish & square shape are available, please contact our sales to make order for special items

Specifications

Models	HB-GR2R
Applications	Sloped ceiling, highlighting artwork
Wattage	5W
Color Temperature(K)	5CCT (Coming soon) 3000/4000
Lumen Output(lm)	400/420
Halogen Equivalent	35W
Beam Angle	38°
CRI	80
Driver Input	120V AC
Power Factor	0.9
Dimming	TRIAC dimmers 100%-10%
Cut out	2-1/8" (54mm)
Approved Location*	Insulated ceiling, Indoor & Wet location
Ambient Temperature	-20°C to +40°C
Air Tight	Yes
Projected Life	70% light output at 50, 000 hours
Certification	ETL
Warranty*	5-year warranty

Approved Location*-please contact our sales for outdoor application
Warranty*-refer to Hi-bright warranty policy

120V Input Driver Included



Accessories

AC120V driver



Model: LR-D120-05A
(Aluminum version)

Extension cables (2pin)



Model: LR-EXC6 6' 2pin cable
LR-EXC10 10' 2pin cable
LR-EXC20 20' 2pin cable