

Recessed LED Trimless Downlight



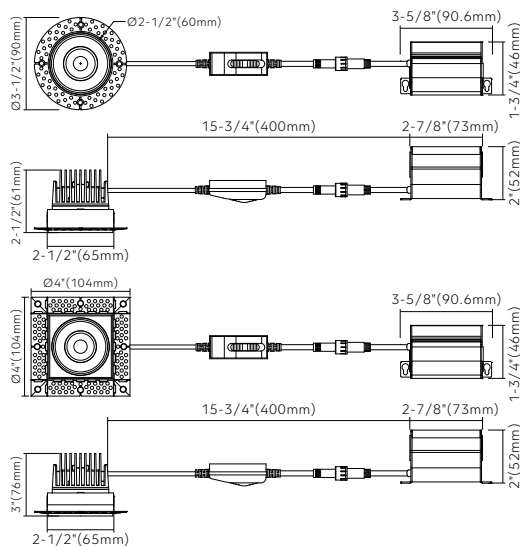
2" Regular



Key Features



- 2" round or square LED trimless downlight with integral driver in connection box
- Type IC rated-no housing needed
- Flexibility to switch color temperature during installation to suit a specific application, just adjust the color temperature with the slide switch located on the wire
- **Smooth trimless look**
- Cut hole in ceiling and snap fixture in opening with attached spring clips
- Aluminum construction

Dimensions



Specifications		
Models	HB-2RB8W5CCTWHT	HB-2SB8W5CCTWHT
Applications	General lighting	
Wattage	8W	
Color Temperature(K)	5CCT (coming soon)	
	2700/3000/3500 /4000/5000	
Lumen Output(lm)	550	
Halogen Equivalent	50W	
Beam Angle	38°	
CRI	90	
Driver Input	120V AC	
Power Factor	0.9	
Dimming	TRIAC dimmers 100%-10%	
Cut out	2-5/8" (67mm)	
Approved Location*	Insulated ceiling, Indoor & Damp/Wet location	
Ambient Temperature	-20°C to +40°C	
Air Tight	Yes	
Projected Life	70% light output at 50,000 hours	
Certification	ETL	
Warranty*	5-year warranty	

Accessories

AC120V driver  Model: D28A-X (Aluminum version)	Extension cables (2pin)  Model: LR-EXC6 6' 2pin cable LR-EXC10 10' 2pin cable LR-EXC20 20' 2pin cable
---	---

Installation

1. Make sure to install plaster frame with arrow pointing upwards (towards the ceiling)
2. Plaster over the mud frame, be careful not to fill past raised rim
3. Connect green wire of cable to green wire on box, white wire of cable to white wire on box, black wire of cable to black wire on box,
4. Insert the fixture to plaster frame, secure the lamp by twisting the fixture twist anti-clockwise to the mud frame

Twist Anti-clockwise

Ordering Guide

Series	Wattage	Color Temperature	Voltage	Finish	
HB-2RB	8W	5CCT (2700K/3000K/3500K/4000K/5000K)	Blank	AC 120V	● WH (Matte White) ● BK (Matte Black)
HB-2SB					

Example: HB-2RB8W5CCTWHT