

LED Floating Gimbal Light


4" Round



Key Features

- 4" LED floating gimbal with integral driver in connection box
- Type IC rated-no housing needed
- Flexibility to switch color temperature during installation to suit a specific application, just adjust the color temperature with the slide switch located on the wire or the junction box
- Superior LED performance and lifespan
- 90° tilting, 360° rotation
- Cut hole in ceiling and snap fixture in opening with attached spring clips
- Steel construction

Dimensions

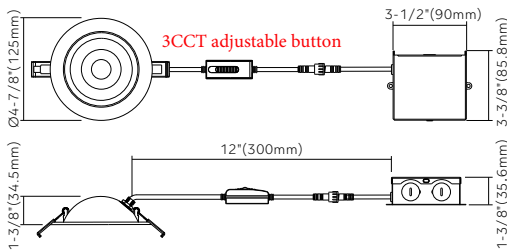

Specifications	
Models	HB-LED-4-S9W-FG-CCT
Applications	Sloped ceiling, highlighting artwork
Wattage	9W
Color Temperature(K)	3CCT
	3000/4000/5000
Lumen Output(lm)	630/650/670
Halogen Equivalent	70W
Beam Angle	38°
CRI	80
Driver Input	120V AC
Power Factor	0.9
Dimming	TRIAC dimmers 100%-10%
Cut out	4-1/4" (108mm)
Approved Location*	Insulated ceiling, Indoor & Damp location
Ambient Temperature	-20°C to +40°C
Air Tight	Yes
Projected Life	70% light output at 50,000 hours
Certification	ETL
Warranty*	5-year warranty

Approved Location*-please contact our sales for outdoor application
Warranty*-refer to Hi-bright warranty policy

120V Input Driver Included



Accessories

Rough-in plate Model: LR-RPU-H 	AC120V driver Model: LR-D120-09SB (Steel version)
Extension cables (3pin) For multiple CCT fixtures with CCT switch on the junction box Model: LR-EXC6-S3 6' 3pin cable LR-EXC10-S3 10' 3pin cable LR-EXC20-S3 20' 3pin cable	

Ordering Guide

Example: FLG-4R9W5CCTWH

Series	Wattage	Color Temperature	Voltage	Finish
HB-LED-4S Recessed Steel Floating Gimbal-4"	9W	3CCT (3000K/4000K/5000K)	(Blank) 120V only	● WH (White)

*-Custom finishes are available