

Recessed LED Trimless Downlight





4" New Style



Key Features

- 4" round LED trimless downlight with integral driver in connection box
- Type IC rated-no housing needed
- Flexibility to switch color temperature during installation to suit a specific application, just adjust the color temperature with the slide switch located on the wire
- **Smooth trimless look**
- **15W and 22W are available**
- LED source SDCM<3
- Enjoy the benefits of voltage surge protection, reliable operation in low-temperature environments and longer driver lifetime
- Die-cast aluminum construction

Dimensions

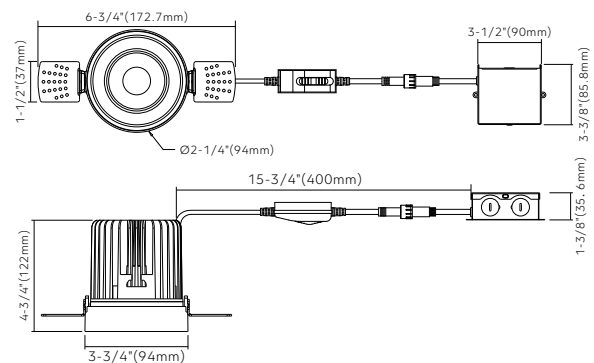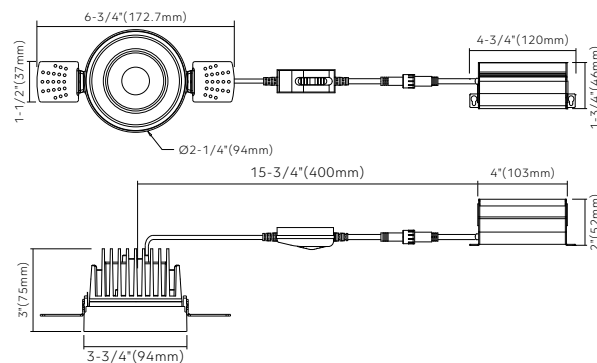

Ordering Guide

Series	Wattage	Color Temperature	Finish	Voltage
HB-4RB	15W	5CCT (2700K/3000K/3500K/4000K/5000K)	● WHT-N (Matte White)	Blank AC 120V
HB-4RB	22W		● BKT-N (Matte Black)	Blank AC 120V
				Mulv AC 120-347V

Example: HB-4RB15W5CCTWHT-N

Specifications

Models	HB-4RB15W5CCTWHT-N	HB-4RB22W5CCTWHT-N
Applications	General lighting	
Wattage	15W	22W
Color Temperature(K)	5CCT (coming soon)	
	2700/3000/3500/4000/5000	
Lumen Output(lm)	1200	1900
Halogen Equivalent	120W	190W
Beam Angle	38°	
CRI	90	
Driver Input	120V AC (120-347V optional)	120V AC
Power Factor	0.9	
Dimming	TRIAC dimmers 100%-10% (0-10V dimming optional)	TRIAC dimmers 100%-10%
Cut out	Ø3-7/8" (100mm)	
Approved Location*	Insulated ceiling, Indoor & Damp/ Wet location	
Ambient Temperature	-20°C to +40°C	
Air Tight	Yes	
Projected Life	70% light output at 50,000 hours	
Certification	cETLus	
Warranty*	5-year limited warranty	

* Due to continuous improvements and innovations, specifications may change without notice

Accessories

AC120V driver



Model: HB15W-X (Aluminum version)

AC120-347V driver



Model: HB24W-X (Steel version)



Model: HB15W-MULV-X (Steel version)

Rough-in plate



Model: HB-TMLP-U