

# Recessed LED Slim Panel

4"



## Key Features

- 4" round or square LED recessed slim panel with integral driver in connection box
- 1/2" Thick - install directly under joists, maximum layout flexibility
- Type IC rated-no housing needed
- Flexibility to switch color temperature during installation to suit a specific application, just adjust the color temperature with the slide switch located on the junction box
- Cut hole in ceiling and snap fixture in opening with attached spring clips
- Die-cast aluminum outer frame + aluminum back plate + PS diffuser



Specifications		
Models	HB-SR4RCCT	HB-SR4SCCT
Applications	General lighting	
Wattage	11W	
Color Temperature(K)	5CCT(Coming soon)	
	2700/3000/3500 /4000/5000	
Lumen Output(lm)	700	
Halogen Equivalent	65W	
Beam Angle	120°	
CRI	90	
Driver Input	120V AC	
Power Factor	0.9	
Dimming	TRIAC dimmers 100%-10%	
Cut out	4-1/4" (108mm)	
Approved Location*	Insulated ceiling, Indoor & Wet location	
Ambient Temperature	-20°C to +40°C	
Air Tight	Yes	
Projected Life	70% light output at 50, 000 hours	
Certification	ETL	
Warranty*	5-year warranty	

Approved Location\*-please contact our sales for outdoor application  
Warranty\*-refer to Hi-bright warranty policy

## 120V Input Driver Included



## Dimensions

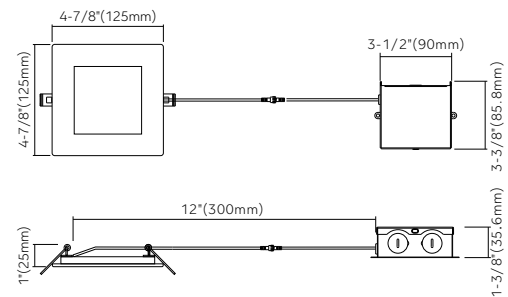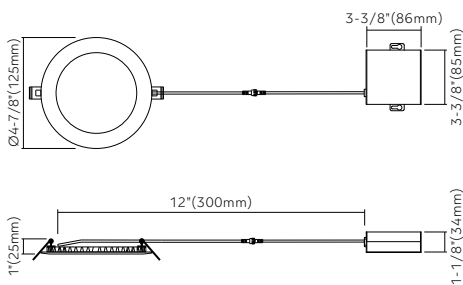

## Ordering Guide

Example: HB-SR4RCCTWH

Series	Wattage	Color Temperature	Voltage	Finish
HB-SR4R Recessed Slim Panel -4" Round	11W	5CCT (2700K/3000K/3500K/4000K/5000K)	(Blank) 120V only	● WH (White)
HB-SR4S Recessed Slim Panel -4" Square				

\* Other finish are available, please contact our sales to make order for special items

# Recessed LED Slim Panel

## Accessories

### Goof ring



BK WH

Model: HBGR4-WH  
(For HB-SR4RCCT)

### Interchangeable trims



BK BN

Model: IT-SR4R  
(For HB-SR4RCCT)

### AC120V driver



Model: LR-D120-09SB  
(Steel version)

### Extension cables (3pin)




Model: LR-EXC6-S3 6' 3pin cable  
LR-EXC10-S3 10' 3pin cable  
LR-EXC20-S3 20' 3pin cable

### Rough-in plate



Model: LR-RPU

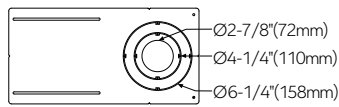

Model: LR-RPU-H  
Special item, please  
contact our sales

