


Recessed Fixed Downlight | Trimless Downlight



Key Features

- 4" round LED trimless downlight with integral driver in connection box
- Type IC rated-no housing needed
- Flexibility to switch color temperature during installation to suit a specific application, just adjust the color temperature with the slide switch located on the wire
- Smooth trimless look
- 15W and 22W are available
- LED source SDCM<3
- Enjoy the benefits of voltage surge protection, reliable operation in low-temperature environments and longer driver lifetime
- Die-cast aluminum construction

Dimensions

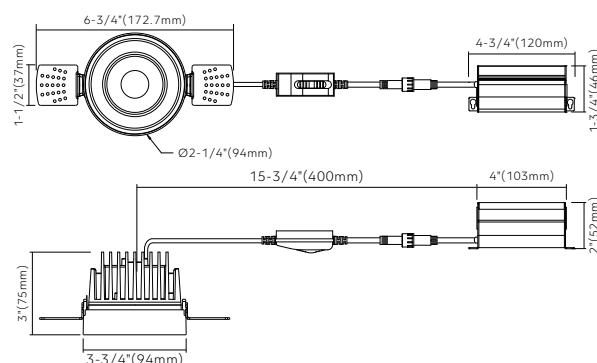

Specifications	
Models	HB-4RB15W5CCTWHT-N HB-4RB22W5CCTWHT-N
Applications	General lighting
Wattage	15W 22W
Color Temperature(K)	5CCT 2700/3000/3500 /4000/5000
Lumen Output(lm)	1200 1900
Halogen Equivalent	120W 190W
Beam Angle	38°
CRI	90
Driver Input	120V AC
Power Factor	0.9
Dimming	TRIAC dimmers 100%-10%
Cut out	3-3/4" (95mm)
Approved Location*	Insulated ceiling, Indoor Wet location Damp location
Ambient Temperature	-20°C to +40°C
Air Tight	Yes
Projected Life	70% light output at 50, 000 hours
Certification	ETL
Warranty*	5-year limited warranty

Accessories

AC120V driver	Extension cables (2pin)
Model: G35RS-X (Aluminum version)	Model: LR-EXC6 6' 2pin cable
Model: D24S-X (Steel version)	Model: LR-EXC10 10' 2pin cable
	Model: LR-EXC20 20' 2pin cable

Ordering Guide

Series	Wattage	Color Temperature	Voltage	Finish
HB-4RB	15W	5CCT (2700K/3000K/3500K/4000K/5000K)	Blank	AC 120V
HB-4RB	22W	5CCT (2700K/3000K/3500K/4000K/5000K)	Blank	AC 120V

Example: HB-4RB15W5CCTWHT

● WH (Matte White)

● *BK (Matte Black)

T Trimless

* Make to Order