


## Recessed Fixed Downlight | Trimless Downlight



### Key Features

- 4" round LED trimless downlight with integral driver in connection box
- Type IC rated-no housing needed
- Flexibility to switch color temperature during installation to suit a specific application, just adjust the color temperature with the slide switch located on the wire
- Smooth trimless look
- 15W and 22W are available
- LED source SDCM<3
- Enjoy the benefits of voltage surge protection, reliable operation in low-temperature environments and longer driver lifetime
- Die-cast aluminum construction

### Dimensions

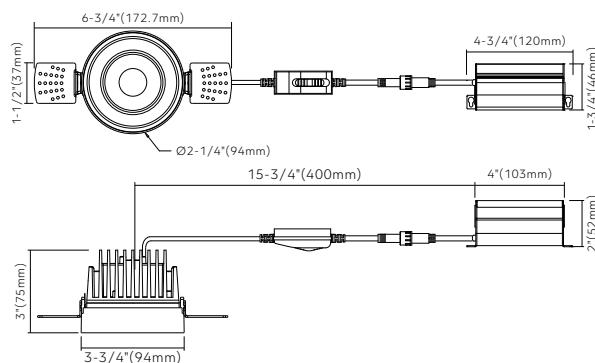

Specifications		
Models	HB-4RB15W5CCTBKT-N	HB-4RB22W5CCTBKT-N
Applications	General lighting	
Wattage	15W	22W
Color Temperature(K)	5CCT 2700/3000/3500 /4000/5000	
Lumen Output(lm)	1200	1900
Halogen Equivalent	120W	190W
Beam Angle	38°	
CRI	90	
Driver Input	120V AC	
Power Factor	0.9	
Dimming	TRIAC dimmers 100%-10%	
Cut out	3-3/4" (95mm)	
Approved Location*	Insulated ceiling, Indoor Wet location	Damp location
Ambient Temperature	-20°C to +40°C	
Air Tight	Yes	
Projected Life	70% light output at 50, 000 hours	
Certification	ETL	
Warranty*	5-year limited warranty	

### Accessories

AC120V driver	Extension cables (2pin)
Model: G35RS-X (Aluminum version)	Model: D24S-X (Steel version)
Model: LR-EXC6 6' 2pin cable LR-EXC10 10' 2pin cable LR-EXC20 20' 2pin cable	

### Ordering Guide

Series	Wattage	Color Temperature	Voltage	Finish	
HB-4RB	15W	5CCT (2700K/3000K/3500K/4000K/5000K)	Blank	AC 120V	WH (Matte White) BK (Matte Black)
HB-4RB	22W				T Trimless

Example: HB-4RB15W5CCTBKT-C

\* Make to Order

