

# Recessed LED Trimless Downlight with Clips




## 4" Round



### Key Features

- 4" round LED trimless downlight with integral driver in connection box
- **Easy installation with spring clips or screws**
- Type IC rated-no housing needed
- Flexibility to switch color temperature during installation to suit a specific application, just adjust the color temperature with the slide switch located on the wire
- LED source SDCM<3
- **Smooth trimless look**
- Enjoy the benefits of voltage surge protection, reliable operation in low-temperature environments and longer driver lifetime
- Die-cast aluminum construction

### Dimensions

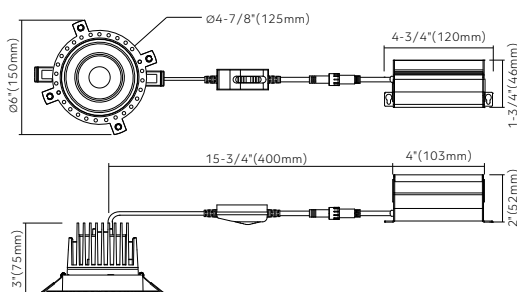

### Ordering Guide

Example: HB-4RB15W5CCTWHT-C

Series	Wattage	Color Temperature	Finish	Voltage
HB-4RB	15W	5CCT (2700K/3000K/3500K/4000K/5000K)	● WHT-C (Matte White)	Blank AC 120V
			● BKT-C (Matte Black)	Mulv AC 120-347V

### Specifications

Models	HB-4RB15W5CCTWHT-C
Applications	General lighting
Wattage	15W
Color Temperature(K)	5CCT 2700/3000/3500 /4000/5000
Delivered Lumen(lm)	1200
Halogen Equivalent	120W
Beam Angle	38°
CRI	>90 (CRI 97 optional, special order)
Driver Input	120V AC (120-347V optional)
Power Factor	0.9
Dimming	TRIAC dimmers 100%-10% (0-10V dimming optional)
Cut out	4-1/4" (108mm)
Approved Location*	Insulated ceiling, Indoor & Wet location
Ambient Temperature	-20°C to +40°C
Air Tight	Yes
Projected Life	70% light output at 50,000 hours
Certification	cETLus
Warranty*	5-year limited warranty

\* Due to continuous improvements and innovations, specifications may change without notice

### Accessories

#### AC120V driver




Model: HB15W-X  
(Aluminum version)

#### AC120-347V driver



Model: HB15W-MULV-X  
(Steel version)

#### Rough-in plate



Model: HBMP-4-Lip