

LED Asymmetric Wall Light




HB-701C

HB-701D


Key Features

- Available in round or square shape with an asymmetric beam spread
- Modern design with high quality aluminum body
- The light will create an attractive romantic impression at night and safely illuminate your way with its bright lighting and stays as a beautiful piece of art on your wall
- Input voltage: DC 12V
- Easy to install, simply to replace, convenient using smaller lamp body, flexible application
- 100%-10% dimming with compatible electronic and magnetic dimming drivers
- They produce high-quality light with low power consumption and are rated to last over 50,000 hours
- You can connect up to 14 fixtures from a 12 volt, 60 watt hardwire box
- Suitable for indoor use only, dry and damp locations

Dimensions

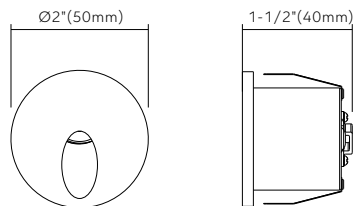

HB-701C

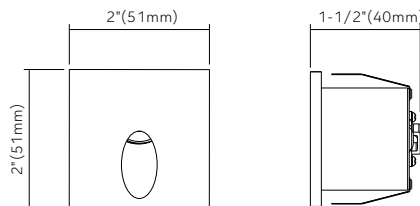

HB-701D

Ordering Guide

Example: HB-701C3KWH-1W-12V

Series	Color Temperature	Finish	Wattage	Voltage
HB-701C HB-701D LED Wall Light	3K (3000K-Single CCT) 4K (4000K-Single CCT) 5K (5000K-Single CCT)	<ul style="list-style-type: none"> ● WH (White) ● BK (Black) ● BN (Brushed Nickel) * 	1W	12V

*-Custom finishes are available

Specifications		
Models	HB-701C	HB-701D
Applications	Deck/ Cabinet	
Wattage	1.5W	
Color Temperature(K)	Single CCT 3000/4000/5000	
Lumen Output(lm)	60/80/90	
Beam Angle	45°	
CRI	80	
Driver Input	12V DC	
Power Factor	0.9	
Dimming	PWM	
Cut out	1-5/8" (40mm)	
Approved Location*	Indoor & Damp location	
Ambient Temperature	-20°C to +40°C	
Air Tight	Yes	
Projected Life	70% light output at 50,000 hours	
Certification	ETL	
Warranty*	5-year warranty	

Approved Location*-please contact our sales for outdoor application
Warranty*-refer to Hi-bright warranty policy

Accessories

12V DC dimmable hardwire box



Model: LR-D12-24A 12V 24W



Model: LR-D12-60S 12V 60W