

LED Recessed Gimbal Module




3" Module Gimbal



Key Features

- LED recessed gimbal with integral driver in connection box.
- **Interchangeable trims, 3" round & square trim available.**
- Type IC rated - no housing needed.
- Easily switch color temperature during installation to suit specific applications. Simply adjust the CCT switch located on the wire.
- 30° tilting, 360° rotation.
- LED source SDCM<3.
- Aluminum construction.
- Designed with surge protection for reliable low-temperature operation and extended driver life.

Dimensions

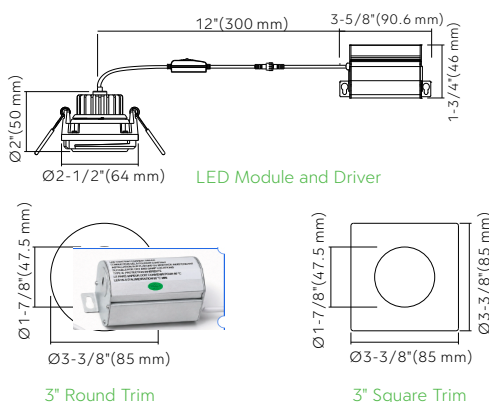

Ordering Guide

Series	Wattage	Color Temperature	Voltage	Interchangeable Trim Shape	Finish
HB	8W	5CCT (2700K / 3000K / 3500K / 4000K / 5000K)	(Blank) 120V only	3RT 3" Round Trim 3ST 3" Square Trim	● WH (White) ● BK (Black)

* Other finishes are available. Please contact our sales team for special orders.

Specifications


Models	HB-8W-5CCT-3RTWH
Applications	Sloped ceiling, highlighting artwork
Wattage	8W
Color Temperature(K)	5CCT (make to order) 2700 / 3000 / 3500 / 4000 / 5000
Delivered Lumen (lm)	650
Halogen Equivalent	65W
Beam Angle	38°
CRI	>90 (CRI 97 optional, special order)
Driver Input	120V AC
Power Factor	0.9
Dimming	TRIAC dimmers 100%-10%
Cut out	Ø2-3/4" (70 mm)
Approved Location*	Insulated ceiling, Indoor & Wet Location
Ambient Temperature	-20°C to +40°C
Air Tight	Yes
Projected Life	70% light output at 50,000 hours
Certification	cETLus
Warranty*	7-year limited warranty

* Due to continuous improvements and innovations, specifications may change without notice

120V Input Driver Included




Interchangeable trims

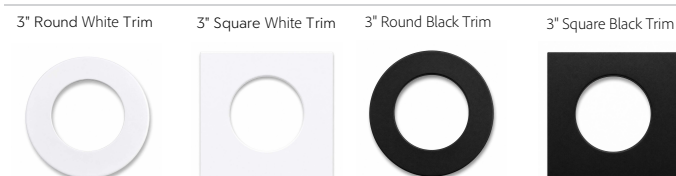

AC120V driver



Rough-in plate



Example: HB-8W-5CCT-3RT-WH