


LDM-COB-528D-Free cut (IP20)

- Light source: COB-528D(IP20)
- Material: superior and heat-resistant 8mm PCB
- Input voltage : DC 24V
- RA>90
- Lifespan: 30, 000 hours
- Easy installation, cuttable and joinable, Accessories complete.

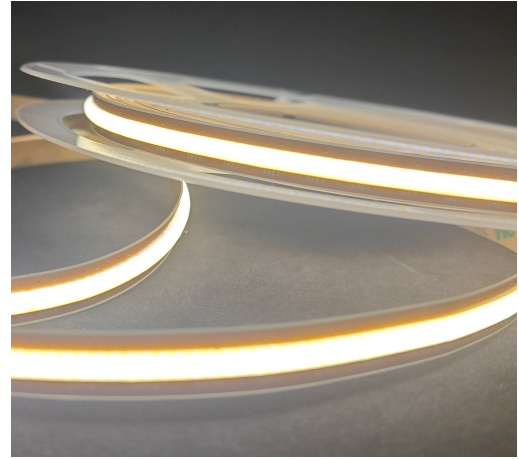

Application


- Cove lighting. Architectural lights for canopy, corridor, Archway
- Backlight or edge lighting for signage, DIY lights for home use.
- Path and contour marking.
- Decorative lights for holiday, event, show, exhibition.



Optical & Electrical

Product Size	5000*8*0.25(mm)
LED Quantity	528PCS
Input Voltage	24V DC
Current	0.42A
Color	3000K
Beam Angle	180°(C°)
Max.Power Consumption	10W
Operating Temperature	-25°C~ +60°C(C°)
Storage Temperature	-40°C~+80°C(C°)
Net Weight	0.2(kg)
Warranty	3 years
Certifications	RoHs & CE & ETL



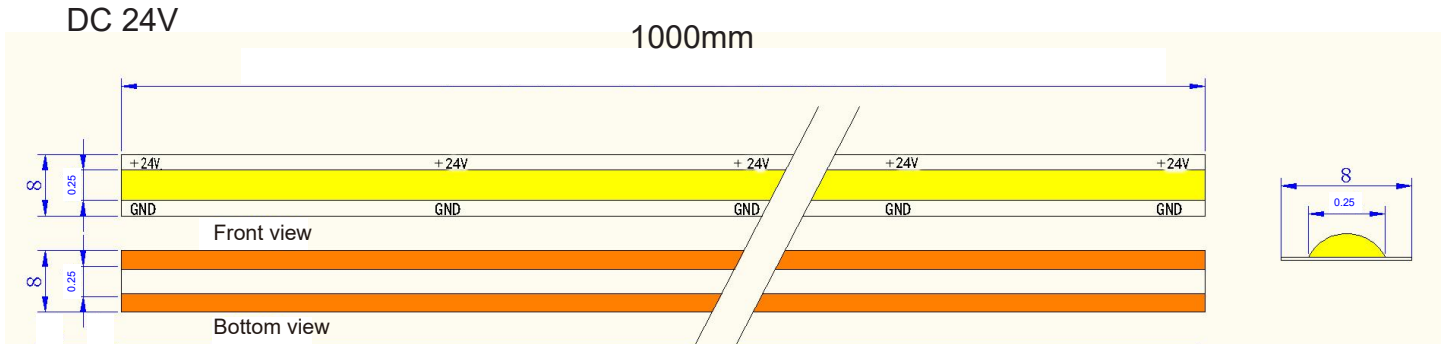

Spectral characteristic curve(25°)

Spectral characteristic curve

Relative spectral emphasis

