

LED Disk Lights

4 Inch, 6 Inch, 8 Inch

Flickering Free DOB Slim Disk


Ideal for entrances, living rooms, bedrooms, kitchens and dens as well as in wet locations, such as bathrooms, showers or outdoors under a porch or eave etc.



Wet Location

5 Years
Limited Warranty

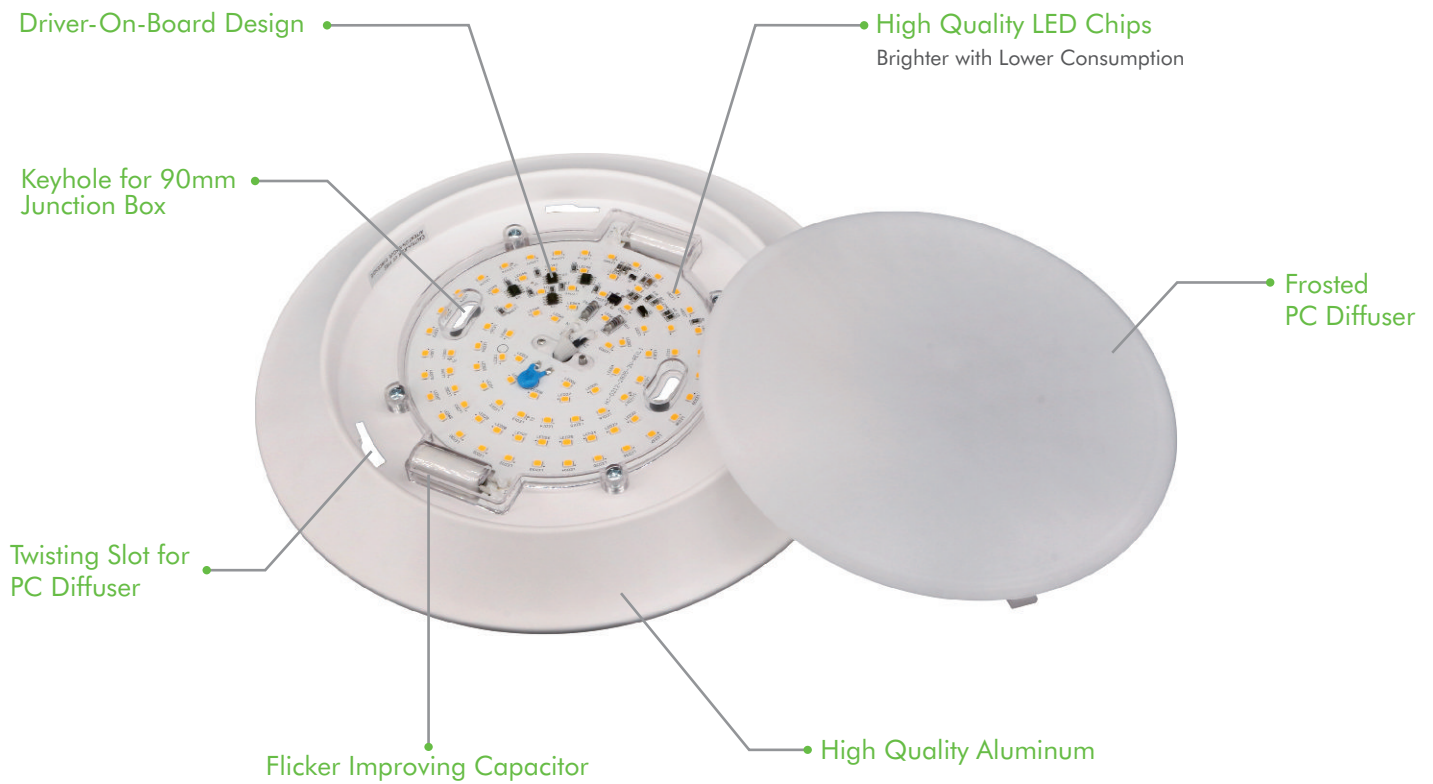


Indoor



Features

- Made of high quality aluminum and PC material, nice finish of the surface and good heat dissipation performance, it emits little heat when turned on, and no flickers, harmless for your eyes
- Input voltage: AC 120V 50/60Hz
- The lighting system is dimmable down to 10% by using an approved dimmer. Refer to dimming matrix for more information
- The LED system fits in most standard junction boxes
- Plus the light features 50,000 hours of life, and California Title-24 compliance
- Designed for indoor use only
- No traditional LED driver needed, suitable for virtually any application
- Flickering free AC design

Color Temperature Options

-  Warm White: 3000K
-  Neutral White: 4000K
-  Cool White: 5000K


Length Options

4" Aluminum Ø164mm	6" Aluminum Ø187mm	8" Steel Ø240mm	8" Aluminum Ø240mm	8" Aluminum Ø240mm
10W 670Lm	15W 900Lm	18W 1200Lm	22W 1500Lm	27W 2000Lm


Trim Options




Dimensions



HB-DL4R10W3KWHIET

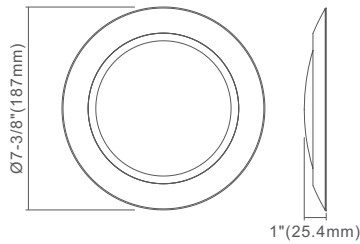


HB-DL6R15W3KWHIET

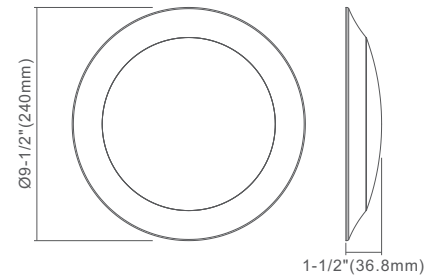

HB-DL8R18W3KWHIET
HB-CSC3027A-LED-3KWH
HB-CSC3027AH-LED-3KWH

Installation (Junction Box)

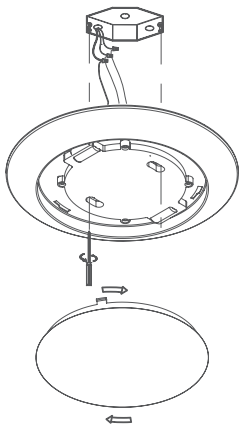

Step 1: Prior to installation, please install two screws (furnished) into the junction box. Do not drive screws completely to the end of the junction box.

Step 2: Connect supply wires to wires in fixture wiring box with proper size wire nuts or push wires into "push-in" connector. Connect white to white, black to black, and green or bare copper wire to bare copper wire.

Step 3: The ground wire at the service junction box may need to be secured to a ground screw.

Step 4: With a screwdriver, attach the disk light tightly to the j-box.


Step 5: Complete the installation by twisting the diffuser on the disk light metal enclosure and lock the diffuser in place.

Step 6: The edge of the fixture and the ceiling use waterproof silicone to seal

4" 10W 3000K 670Lm Brushed Nickel Finish

Ordering Guide

Picture	Model	Description
	4" Aluminum LED Disk Light - Warm White	
	HB-DL4R10W3KWHIET	4" 10W 3000K 670LM White Finish
		4" 10W 3000K 670LM White Finish
	4" Aluminum LED Disk Light - 3000K, 4000K, 5000K	
	HB-DL4R10W4KCCT	4" 10W 4000K 690LM White finish Color Selectable between 3000K, 4000K and 5000K
	6" Aluminum LED Disk Light - Warm White	
	HB-DL6R15W3KWHIET	6" 15W 3000K 900Lm White Finish
	6" Aluminum LED Disk Light - Neutral White	
	HB-DL6R15W4KWHIET	6" 15W 4000K 920Lm White Finish

Picture	Model	Description
	8" Steel LED Disk Light - Warm White	
	HB-CSC3027-LED-18W-3KWH	8" 18W 3000K 1200Lm White Finish

Compatible With Eaton's Crouse-hinds Junction Boxes



TP316
for non-metallic cable
4" x 4" x 2-1/8"
(102mm x 102mm x 54mm)




TP317
for metal clad cable
4" x 4" x 2-1/8"
(102mm x 102mm x 54mm)

- TP316 - for non-metallic cable
- TP317 - for metal clad cable
- UL Listed
- Suitable for two-hour fire-rated ANSI/UL 263 when properly installed in a fire-rated ceiling or wall
- Refer to www.crouse-hinds.com

Compatible With Many Other Junction Boxes*



4" octagon light fixture/fan steel box
4" x 4" x 2-1/8"
(102mm x 102mm x 54mm)



4" octagon steel box
4" x 4" x 1-1/2"
(102mm x 102mm x 38mm)



4" square deep steel box
4" x 4" x 2-1/8"
(102mm x 102mm x 54mm)



4" square standard steel box
4" x 4" x 1-1/2"
(102mm x 102mm x 38mm)



4" round new work non-metallic light fixture/fan box
4" diameter x 2-3/16"
(102mm x 56mm)



3-1/2" round new work non-metallic ceiling box
3-1/2" diameter x 2-3/4"
(89mm x 70mm)



3-1/2" round old work non-metallic box
4-1/4" O.D. flange, 3-1/2" I.D. x 2-5/8"
(108mm O.D., 89mm I.D. x 67mm)



4" round surface mount box
4" diameter x 1-1/2"
(102mm x 38mm)
Requires SLD6RAD adapter



4" round new work non-metallic box with hanger bar assembly
4" diameter x 2-3/16" (102mm x 56mm)