

# LED Gimbal Recessed Lights




## 2" Round



### Key Features


- 2" round LED recessed gimbal with integral driver in connection box
- Eyeball, round & square models
- Type IC rated-no housing needed
- Flexibility to switch color temperature during installation to suit a specific application, just adjust the color temperature with the slide switch located on the wire
- Superior LED performance and lifespan
- **30° tilting, 360° rotation**
- Cut hole in ceiling and snap fixture in opening with attached spring clips
- Aluminum construction

### Dimensions

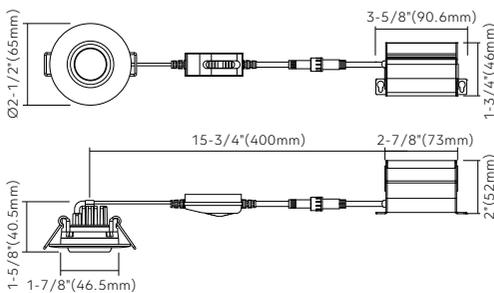

Specifications	
Models	HB-GR2R
Applications	Sloped ceiling, highlighting artwork
Wattage	5W
Color Temperature(K)	5CCT (Coming soon)
	2700/3000/3500 /4000/5000
Lumen Output(lm)	350
Halogen Equivalent	35W
Beam Angle	38°
CRI	90
Driver Input	120V AC
Power Factor	0.9
Dimming	TRIAC dimmers 100%-10%
Cut out	2-1/8" (54mm)
Approved Location*	Insulated ceiling, Indoor & Damp location
Ambient Temperature	-20°C to +40°C
Air Tight	Yes
Projected Life	70% light output at 50,000 hours
Certification	ETL
Warranty*	5-year

### 120V Input Driver Included



### Accessories

<b>AC120V driver</b> 	Model: G25A-X (Aluminum version)
<b>Extension cables (2pin)</b> 	Model: LR-EXC6    6' 2pin cable LR-EXC10    10' 2pin cable LR-EXC20    20' 2pin cable

### Ordering Guide

Example: HB-GR2R5W5CCTWH

Series	Wattage	Color Temperature	Voltage	Finish
<b>HB-GR2R</b> Recessed Gimbal -2" Round	<b>5W</b>	<b>5CCT</b> (2700K/3000K/3500K/4000K/5000K)	<b>(Blank)</b> 120V only	● <b>WH</b> (White)

\* Other finish & square shape are available, please contact our sales to make order for special items