

Recessed LED Combo Downlight




3-light



Key Features

- 3.5" LED multiple of 3-light regressed downlight with integral one to three J-box
- **15° tilting, 360° rotation**
- Type IC rated-no housing needed
- Flexibility to switch color temperature during installation to suit a specific application, just adjust the color temperature with the slide switch located on the wire
- 1 to 3 driver for faster installation
- LED source SDCM<3
- Aluminum construction
- **Enjoy the benefits of voltage surge protection, reliable operation in low-temperature environments and longer driver lifetime**

Dimensions

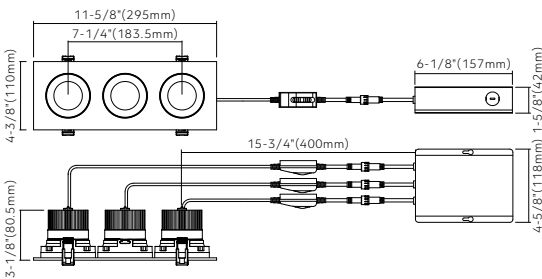

Specifications

Models	HB-G335R
Applications	Sloped ceiling, highlighting artwork
Wattage	36W
Color Temperature(K)	5CCT
Delivered Lumen(lm)	2700/3000/3500/4000/5000
Halogen Equivalent	300W
Beam Angle	38°
CRI	>90 (CRI 97 optional, special order)
Driver Input	120V AC
Power Factor	0.9
Dimming	TRIAC dimmers 100%-10%
Cut out	10-7/8" x 3-3/4" (275x95mm)
Approved Location*	Insulated ceiling, Indoor & Wet location
Ambient Temperature	-20°C to +40°C
Air Tight	Yes
Projected Life	70% light output at 50,000 hours
Certification	ETL
Warranty*	5-year


* Due to continuous improvements and innovations, specifications may change without notice

120V Input Driver Included



Accessories

Rough-in plate



Model: ATLRD35-RP-U



Extension cables (2pin)

Model: G335R-X (Aluminum version)

Model: LR-EXC6 6' 2pin cable
LR-EXC10 10' 2pin cable
LR-EXC20 20' 2pin cable

Ordering Guide

Example: HB-G335R36W5CCTWH

Series	Wattage	Color Temperature	Voltage	Finish
HB-G335R Recessed LED Combo Downlight -3.5" Multiple of 3-light	36W	5CCT (2700K/3000K/3500K/4000K/5000K)	(Blank) 120V only	<ul style="list-style-type: none"> ● WH (White) ● BK (Black)

* Other finish are available, please contact our sales to make order for special items