

# LED Closet Lights with PIR Motion Sensor


6"



## Key Features

- **Construction:** one piece die-cast aluminum formed luminaire. Aluminum body dissipates heat and extends life. Polycarbonate lens with integrated PIR motion sensor.
- **Mounting:** AC design, it is flat on the back and suitable for installation on or over most standard junction boxes.
- **PIR Motion Sensor:** PIR (passive infrared) motion sensor for easy on/off operation. The sensor activates when motion is detected. After 30 seconds of no motion, the fixture automatically turns off. PIR sensor can detect motion up to 16' diameter away (unobstructed) when mounted at 8'
- **Ratings:** IC rated when used with a electrical junction box rated for direct contact with insulation. Fire rated when used with a fire rated junction box.

## Dimensions

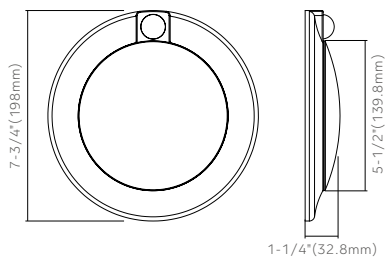


Specifications	
Models	HB-114-6-CCT
Applications	Residential/commercial/office
Wattage	15W
Color Temperature(K)	3 CCT
	3000/4000/5000
Lumen Output(lm)	900
Halogen Equivalent	100W
Beam Angle	120°
CRI	80
Driver Input	120V AC
Power Factor	0.9
Dimming	Non dimmable
Approved Location*	Insulated ceiling, Indoor & Dry/Wet location
Ambient Temperature	-20°C to +40°C
Air Tight	Yes
Projected Life	70% light output at 50, 000 hours
Certification	ETL
Warranty*	5-year warranty

Approved Location\*-please contact our sales for outdoor application  
Warranty\*-refer to Hi-bright warranty policy

## Integrated PIR Sensor

The PIR coverage area is a 16' radius from a standard 8' mounting height. The fixture will turn on during occupancy detection and remain on for 30 seconds (customized is available) after vacancy is detected

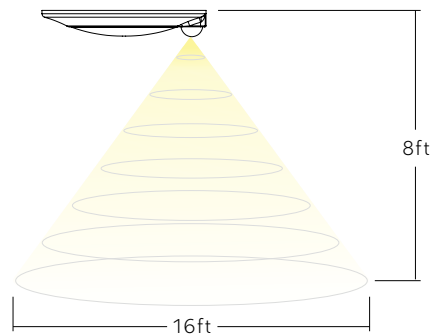

## Ordering Guide

Example: HB-114-6-CCT

Series	Wattage	Color Temperature	Voltage	Finish
HB-114-6-CCT Surface Mount PIR -6"	15W	3CCT (3000K/4000K/5000K)	(Blank) 120V only	● WH (White)

\* Other finish are available, please contact our sales to make order for special items