

2" LED Regressed Downlight


2" Round



Key Features

- 2" round LED downlight with integral driver in connection box
- Type IC rated-no housing needed
- Flexibility to switch color temperature during installation to suit a specific application, just adjust the color temperature with the slide switch located on the wire
- Smooth design
- Available shape: round & square
- Cut hole in ceiling and snap fixture in opening with attached spring clips
- Aluminum construction

Dimensions

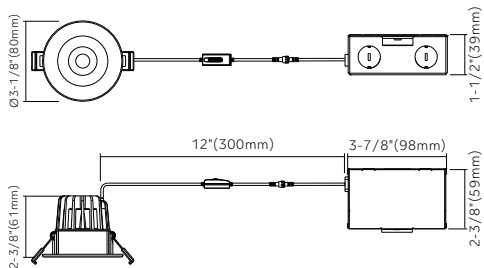

Specifications

Models	HB-2RB
Applications	General lighting
Wattage	8W
Color Temperature(K)	5CCT
	2700/3000/3500 /4000/5000
Lumen Output(lm)	480/490/510
	/530/550
Halogen Equivalent	60W
Beam Angle	38°
CRI	90
Driver Input	120V AC
Power Factor	0.9
Dimming	TRIAC dimmers 100%-10%
Cut out	2-7/8" (72mm)
Approved Location*	Insulated ceiling, Indoor & Wet location
Ambient Temperature	-20°C to +40°C
Air Tight	Yes
Projected Life	70% light output at 50, 000 hours
Certification	ETL
Warranty*	5-year warranty

Approved Location*-please contact our sales for outdoor application
Warranty*-refer to Hi-bright warranty policy

120V Input Driver Included



Accessories

Rough-in plate Model: LR-RPU-H Special item, please contact our sales 	AC120V driver Model: LR-D120-08S (Steel version)
Model: LR-RPU 	Extension cables (2pin) Model: LR-EXC6 6' 2pin cable LR-EXC10 10' 2pin cable LR-EXC20 20' 2pin cable

Ordering Guide

Example: HB-2RB8W5CCTWH

Series	Wattage	Color Temperature	Voltage	Finish	
HB-2RB	Recessed Downlight -2" Round Smooth	8W	5CCT (2700K/3000K/3500K/4000K/5000K)	(Blank) 120V only	● WH (White) ● BK (Black)

* Other finish & square shape are available, please contact our sales to make order for special items