

LED Recessed Gimbal Module

3" / 4" Gimbal



Key Features

- LED recessed gimbal with integral driver in connection box
- **Interchangeable trims, 3", 4" round & square trim available**
- Type IC rated-no housing needed
- Superior LED performance and lifespan
- 30° tilting, 360° rotation
- Cut hole in ceiling and snap fixture in opening with attached spring clips
- Aluminum construction

Specifications	
Models	HB-8W-3K
Applications	Sloped ceiling, highlighting artwork
Wattage	8W
Color Temperature(K)	3000
Lumen Output(lm)	550
Halogen Equivalent	60W
Beam Angle	38°
CRI	80
Driver Input	120V AC
Power Factor	0.9
Dimming	TRIAC dimmers 100%-10%
Cut out	2-7/8" (72mm)
Approved Location*	Insulated ceiling, Indoor & Wet location
Ambient Temperature	-20°C to +40°C
Air Tight	Yes
Projected Life	70% light output at 50,000 hours
Certification	ETL
Warranty*	5-year warranty

Approved Location*-please contact our sales for outdoor application
Warranty*-refer to Hi-bright warranty policy

120V Input Driver Included



Accessories

Interchangeable trims



3" Round Trim



3" Square Trim



4" Round Trim



4" Square Trim

AC120V driver



Model: LR-D120-08S
(Steel version)

Extension cables (2pin)




- Model: LR-EXC6 6' 2pin cable
- LR-EXC10 10' 2pin cable
- LR-EXC20 20' 2pin cable


Rough-in plate



Model: LR-RPU-H
Special item, please contact our sales









Model: LR-RPU



LED Recessed Gimbal Module

Dimensions

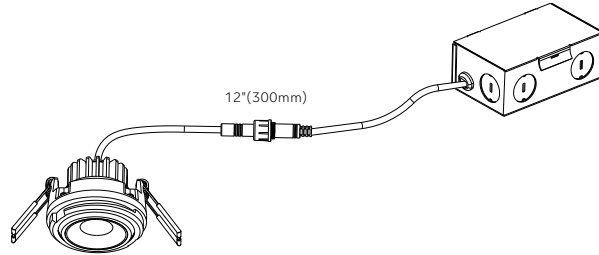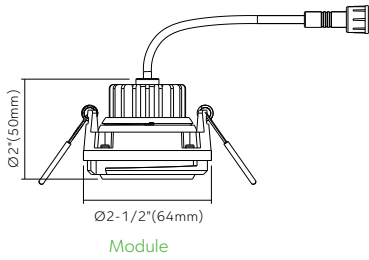

Ordering Guide

Example: HB-8W-5CCT-3RT-BK

Series	Wattage	Color Temperature	Voltage	Interchangeable Trim	Finish	
HB-	Recessed Module Gimbal	8W	3000K	(Blank)	3RT 3" Round Trim	BK(Black) BN (Brushed Nickel) WH (White)
				120V only	3ST 3" Square Trim	
					4RT 4" Round Trim	
					4ST 4" Square Trim	
				/		