

LED Regressed Gimbal Lights


4" Round



Key Features

- 4" round flat LED recessed regressed gimbal with integral driver in connection box
- Eyeball, round & square regressed models
- Type IC rated-no housing needed
- Flexibility to switch color temperature during installation to suit a specific application, just adjust the color temperature with the slide switch located on the fixture
- Superior LED performance and lifespan
- 30° tilting, 360° rotation
- Cut hole in ceiling and snap fixture in opening with attached spring clips
- Aluminum construction

Dimensions

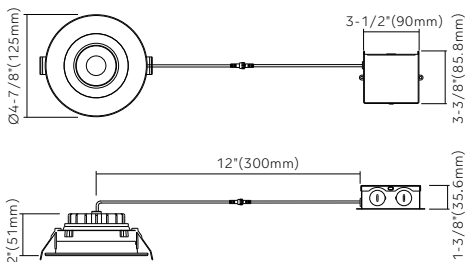

Specifications	
Models	HB-R4R
Applications	Sloped ceiling, highlighting artwork
Wattage	12W
Color Temperature(K)	5CCT
	2700/3000/3500 /4000/5000
Lumen Output(lm)	980/1000/1010 /1020/1015
Halogen Equivalent	100W
Beam Angle	38°
CRI	80
Driver Input	120V AC
Power Factor	0.9
Dimming	TRIAC dimmers 100%-10%
Cut out	4-3/8" (110mm)
Approved Location*	Insulated ceiling, Indoor & Wet location
Ambient Temperature	-20°C to +40°C
Air Tight	Yes
Projected Life	70% light output at 50,000 hours
Certification	ETL
Warranty*	5-year warranty

Approved Location*-please contact our sales for outdoor application
Warranty*-refer to Hi-bright warranty policy

120V Input Driver Included



Accessories

Rough-in plate Model: LR-RPU-H Special item, please contact our sales 	AC120V driver Model: LR-D120-12SB (Steel version)
Model: LR-RPU 	Extension cables (3pin) Model: LR-EXC6-S3 6' 3pin cable LR-EXC10-S3 10' 3pin cable LR-EXC20-S3 20' 3pin cable

Ordering Guide

Example: HB-R4R12W5CCTWH

Series	Wattage	Color Temperature	Voltage	Finish	
HB-R4R	Recessed Regress Flat Gimbal-4" Round	12W	5CCT (2700K/3000K/3500K/4000K/5000K)	(Blank) 120V only	● WH (White)

* Other finish & square shape are available, please contact our sales to make order for special items