
LDM-2835-196D Low Voltage Flexible LED Strip (IP20)

- Light source: 196 pcs/m SMD2835
- Material: superior and heat-resistant 15mm PCB
- Input voltage: DC 24V
- RA>80
- Lifespan: 30,000 hours
- Easy installation, cuttable and joinable, Accessories complete.



Application:

- Cove lighting. Architectural lights for canopy, corridor, Archway
- Backlight or edge lighting for signage, DIY lights for home use
- Path and contour marking
- Decorative lights for holiday, event, show, exhibition.




Optical & Electrical:


Product Size(mm)	5000*15*0.25
LED Quantity(per meter)	196 PCS
LED Type	2835 SMD LED
Input Voltage	24V DC
Current(Amps/m)	0.92
Min Cuttable Length(mm)	71.43
Beam Angle	120°
Max. Power Consumption(W/meter)	22W
Operating Temperature	-25°C~ +45°C
Storage Temperature	-30°C~ +80°C
Net Weight(kg)	0.3
Estimated Life	30,000 hrs
Certifications	RoHs & CE & ETL

Demensions:

DC24V

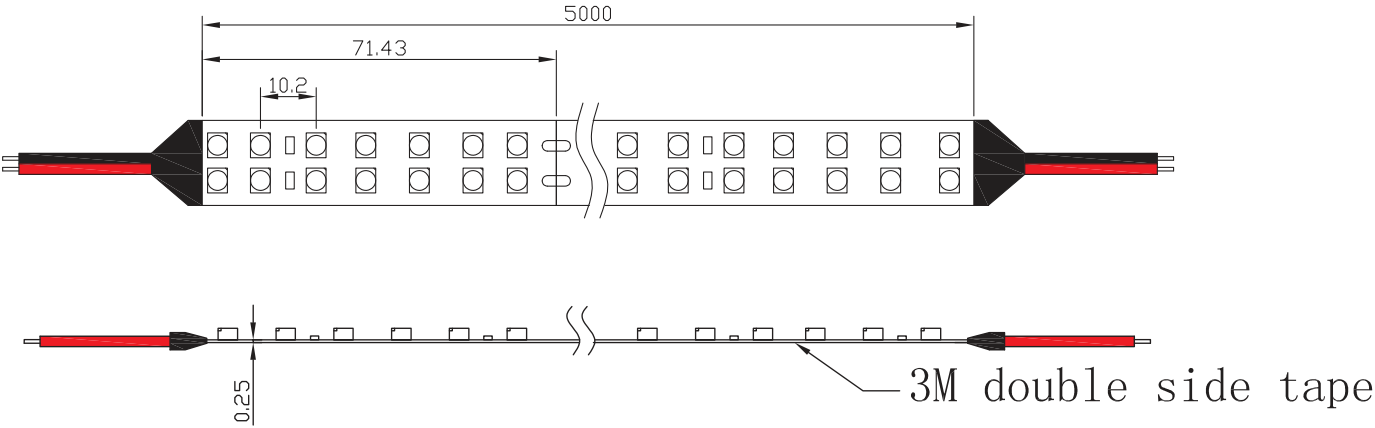

Electrial Principle:

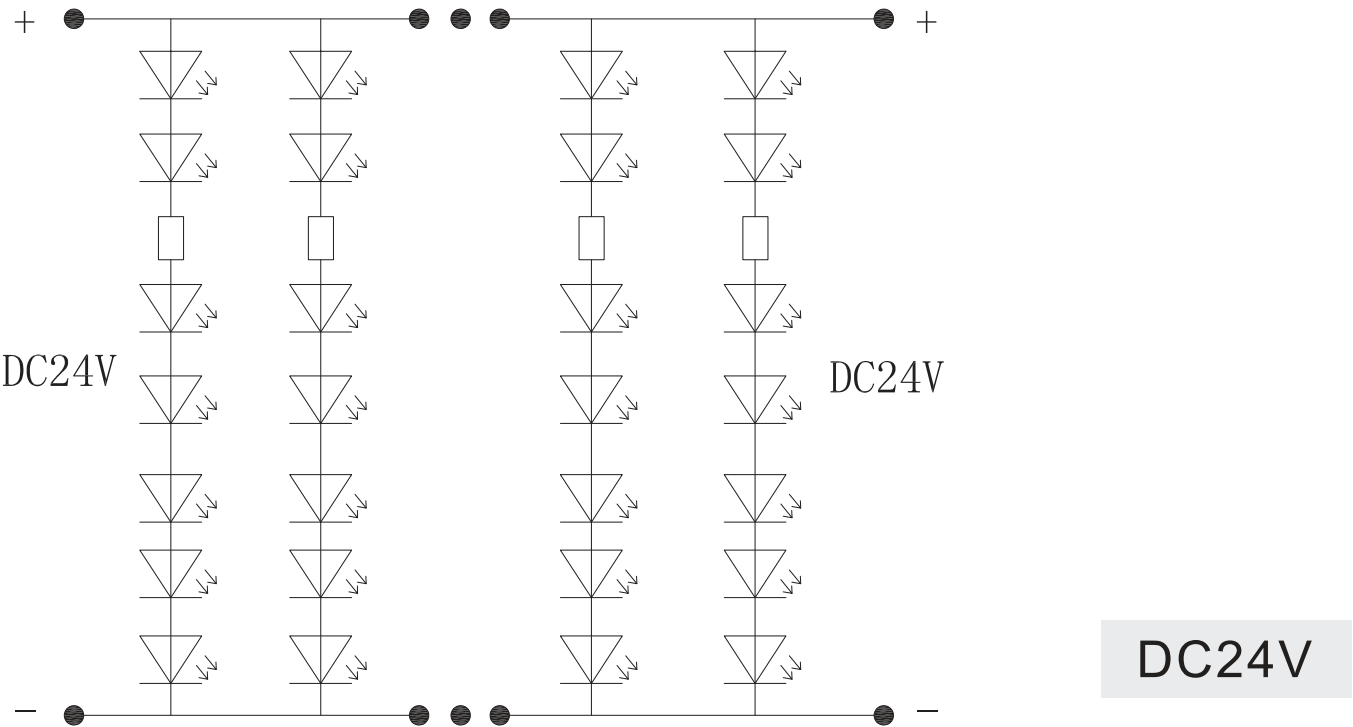


Optical Parameters:


Item No.	Color	CCT	Lumen/Meter	IP Rate
LDM-2835 -126D	Warm white	2200-2400K	1900LM	IP20
		2600-2800K	1900LM	
		2800-3000K	2000LM	
		3000-3200K	2000LM	
	Natural white	4000-4500K	2150LM	
	Pure White	5000-5500K	2150LM	
	Cool white	5500-6500K	2150LM	

Linking operation:


The maximum length in series is **5 meters** when led strip is DC 12V

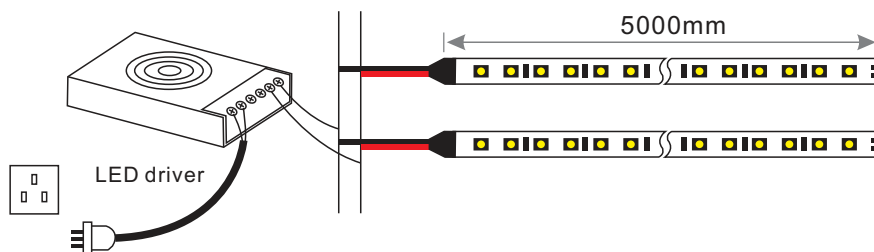


The maximum length in series is **10 meters** when led strip is DC 24V

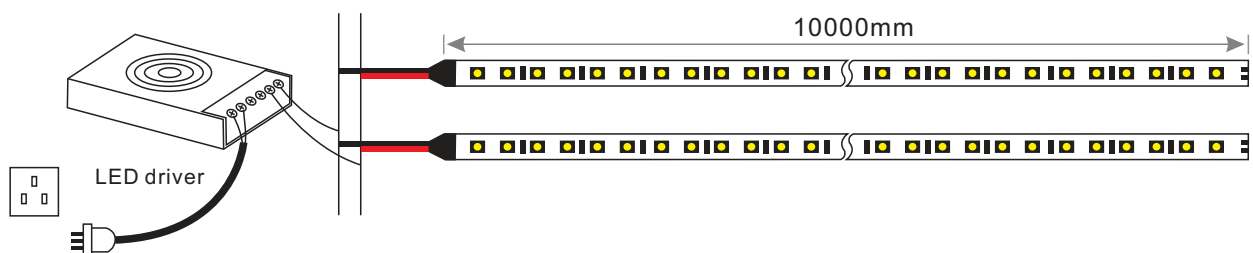


Parallel connection is highly recommended as safe electrical operation mode.

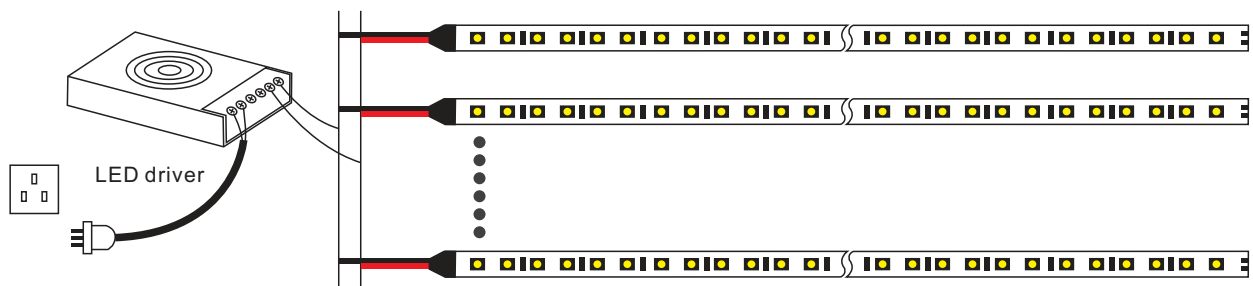


Installation Steps:




- Clean the installation surface




- Measure the length you need to install, cut at the nearest scissor mark line.




- Do not pull the whole led strip from the back release paper by one time. No press on the leds.






- Connect the led strip wire to the driver output side
- Connect the driver input side to power-supply.




- Switch on and enjoy.

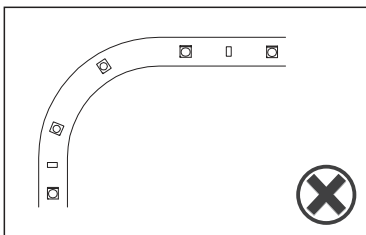

- No bending at the point of leds

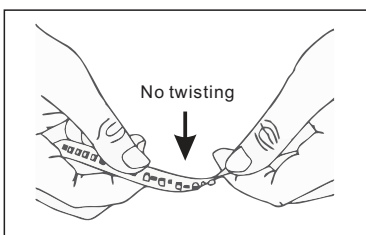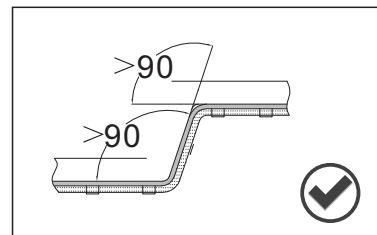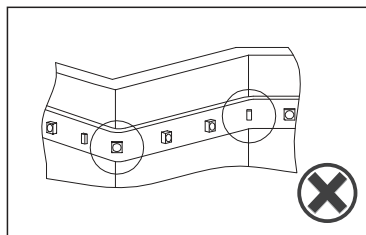


- No contortion of the led strip

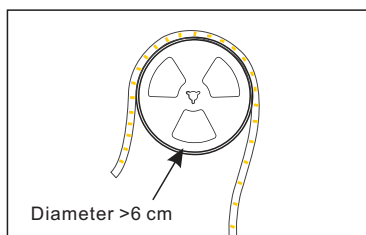


- No bending with Diameter < 6cm


Packing information:




LED flexible strip
(5M)



Reel



Anti-static foil bag
(1 PCS)

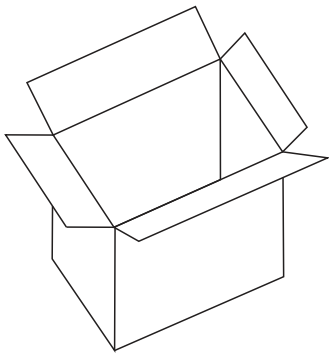

Inside the box
(35 Packages)
49.5x34x24cm