


Flexible Top-View Neon LED Strip Light



NH-0611-COB

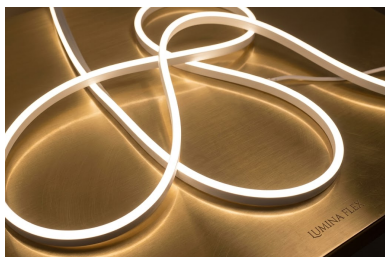

Key Features


- All-white silicone housing provides a clean, modern appearance
- Blends seamlessly into white ceilings, walls, cabinetry and architectural surfaces
- White top diffuser delivers smooth, uniform and dot-free illumination
- Compact 6 × 11 mm profile for space-limited installations
- High-density COB technology with luminous output up to 700 lm/m
- CRI >90 for accurate and natural colour rendering
- Available in 2700 K, 3000 K, 3500 K and 4000 K

Applications

- White ceilings and architectural details
- Kitchen cabinets and shelving
- Residential ambient lighting
- Hotels, restaurants and hospitality spaces
- Retail displays and showcases
- Outdoor architectural and landscape accents



Cutting Method

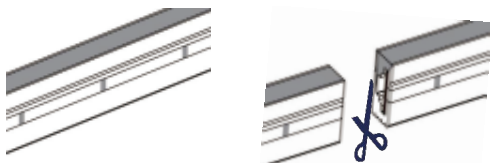

Cut only at the marked cutting points



Ordering Guide

Series	Neon Type	LED Type	Color Temperature	Voltage	Length(Meter)
NH Neon Light	0611(Top-View)	COB	2700K/3000K/3500K/4000K	24V - Blank	Custom Lengths

Example: NH-0611-COB-2700K

	Specifications
Model	NH-0611-COB
Product Dimensions	6 mm (H) × 11 mm (W)
Light-Emitting Direction	Top-View
Bending Direction	Vertical Bending (Top-Bend)
LED Type	COB
LED Density	480 LEDs/m (2700 K); 384 LEDs/m (Other CCTs)
PCB Width	8 mm
Input Voltage	24 V DC
Power Consumption	10 W/m
Colour Temperature	2700 K / 3000 K / 3500 K / 4000 K
Luminous Flux	Up to 700 lm/m
CRI	>90
Beam Angle	120°
Cutting Interval	21 mm (3000K/3500K/4000K); 50 mm (2700K)
Dimming	Dimmable
Housing Material	Flexible white silicone with white diffuser
IP Rating	IP67
Operating Temperature	-20 °C to +50 °C
Mounting Method	Mounting clips or aluminum channel
Available Lengths	Custom cut lengths
Certification	cETLus
Warranty	3-Year Limited Warranty

Dimensions



Accessories



End Cap with Cable Outlet



Closed End Cap



Mounting Clip