

Flexible Top/Side View Neon LED Strip Light



NH-1010-COB (2835)




Key Features


- Dot-Free Lighting: Smooth, uniform COB illumination.
- Compact Design: Slim 10 × 10 mm profile available in top-bending and side-bending versions.
- Colour Options: 3000 K, 4000 K.
- High CRI: CRI >90, up to 490 lm/m.
- Power: 24 V DC, 7.2 W/m, dimmable.
- IP67 Rated: Suitable for indoor and outdoor use when properly sealed.
- Custom Lengths: Cuttable at designated dark spots.
- Easy Installation: Compatible with mounting clips, rigid aluminium profiles and stainless-steel flexible profiles.

Applications

- Ideal for architectural accents, cove lighting, ceilings, walls, cabinetry, retail displays, hospitality spaces, and indoor or outdoor decorative lighting.

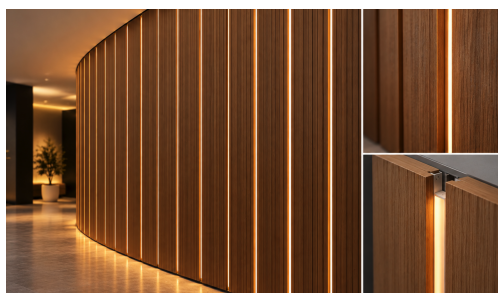

Cutting Method

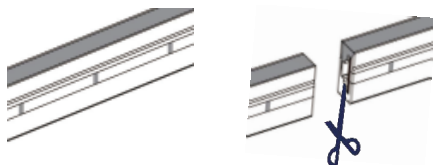


Cut only at the designated dark spots on the neon flex

Ordering Guide


Series	Neon Type	LED Type	Color Temperature	Voltage	Length(Meter)
NH Neon Light	1010 (Top-Bend) 1010S (Side-Bend)	COB 2835	3000K 4000K	24V - Blank	Custom Length

	Specifications
Model	NH-1010-COB (2835)
Product Dimensions	10 × 10 mm
Light-Emitting Direction	Top-Emitting
Bending Direction	Vertical Bending (Top-Bend) or Horizontal Bending (Side-Bend)
LED Type	COB 2835
LED Density	400 LEDs/m 120 LEDs/m
PCB Width	5 mm
Input Voltage	24V DC
Power Consumption	7.2 W/m
Colour Temperature	3000K/4000K
Luminous Flux	Up to 510 lm/m
CRI	>90
Beam Angle	120°
Cutting Interval	21 mm
Dimming	Dimmable
Housing Material	Flexible white silicone with white diffuser
IP Rating	IP67
Available Lengths	Custom lengths available
Operating Temperature	-20°C to +50°C
Certification	cETLus
Mounting Method	Mounting clips or aluminum channel
Warranty	3-Year Limited Warranty

Dimensions

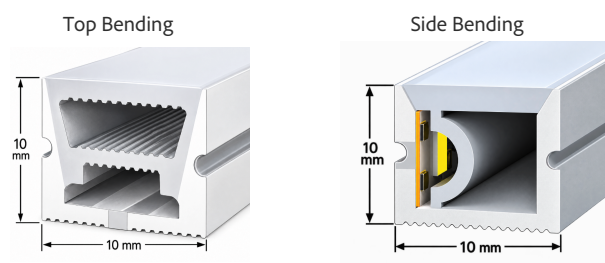

Installation Options

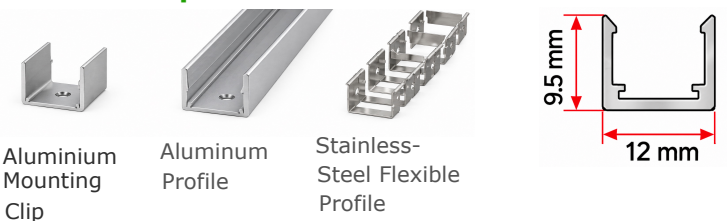

Example: NH-1212-COB-3000K