

Side View Flexible NEON Strip Light



NH-1225




Key Features

- Dot-free uniform glow with high-quality silicone extrusion
- Side View vertical bending for smooth curves and creative designs
- Energy-efficient SMD2835 LEDs with 80–100 lm/W efficacy
- Custom cut-to-length available for flexible installation
- Durable & weatherproof – IP67 rated (fully sealed against dust and water)
- Wide beam angle (120°) for even illumination
- Color temperatures: available in 3000K, 3500K, 4000K, 5000K
- Certified safety & reliability – cETLus approved

Specification	
Model	NH-1225-2835-XXXX
Product Size	12mm (W) x 25mm (H)
Light Direction	Side View
LED Type	SMD2835
PCB Width	8mm
Input Voltage	DC12V DC24V
Power Consumption	10W/m
Color Temperature	3000K, 3500K, 4000K, 5000K
CRI:	>80
Luminous Efficacy	80–100 lm/W
Cutting Unit	Every 25mm
Beam Angle	120°
Current (Amps/meter)	0.83(12V) 0.42 (24V)
Bending Direction	Vertical (Side View)
Material	Flexible silicone extrusion
IP Rating	IP67 (Fully sealed & waterproof)
Operating Temperature	-20°C to +50°C
Mounting Options	Recessed or surface mount with clips/profile
Net Weight	180 g/m
Length	Custom lengths available
Certifications	cETLus
Warranty	3 Years


Dimensions

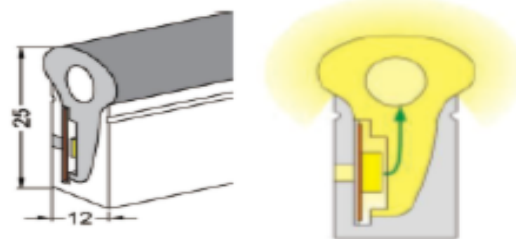


Application:

- Architectural outlines & façade lighting
- Indoor and outdoor accent lighting
- Signage, logos, and decorative designs
- Hotels, restaurants, and retail spaces
- Cove and contour lighting

Installation Instructions - Cutting Method

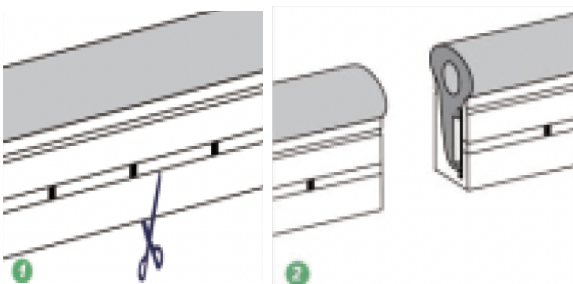

Linking operation:

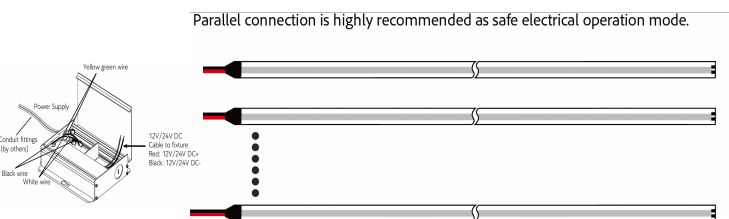

Ordering Guide

Series		Size	LED Type	Color Temperature	Length(Meter)
NH	LED Neon Strip Light	1225	2835	3000K	<ul style="list-style-type: none">• 1 meter• Custom Lengths
				3500K	
				4000K	
				5000K	