

Side View Flexible NEON Strip Light



NH-1225-5050-RGBW




Key Features

- RGBW Color: Offers vibrant, full-spectrum lighting.
- High CRI >80: Ensures accurate color rendering.
- Compact Size: 12mm width x 25mm height for versatile use.
- Efficient: DC 24V, 14.4W/m power consumption.
- P67 Rated: Waterproof for outdoor applications.
- cETLus Certified: Meets safety standards.
- Highly Flexible: Offers excellent flexibility, allowing for versatile shaping and customization.

Application:

- Architectural Lighting: Perfect for accentuating building features with vibrant colors.
- Outdoor Installations: Ideal for pathways, gardens, and exterior facades due to its waterproof IP67 rating.
- Signage and Displays: Suitable for creating eye-catching signs and displays with dynamic RGBW lighting.
- Interior Design: Enhances ambiance in commercial spaces, retail environments, and homes.
- Event and Stage Lighting: Provides versatile color options for dynamic lighting effects in events and performances.



Installation Instructions - Cutting Method

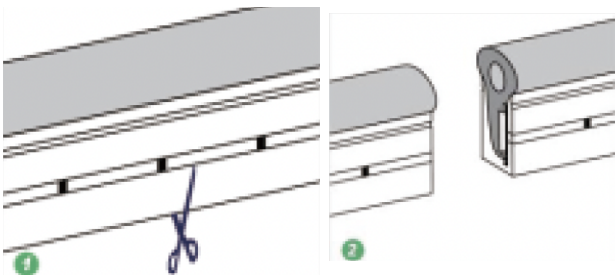


Specifications	
Models	NH-1225-5050-RGBW
Product Size(mm)	5000*12*25
LED Type	5050
Single Color Temperature*	RGBW
Lumen/Meter	150 350 150 600
Input Voltage*	24V DC
Current (Amps/meter)	0.60
Min Cuttable Length(mm)	100
Max Power Consumption (Watt/m)	14.4
CRI	> 80
Dimming	Dimmable
Beam Angle	180°
LED Quantity(per meter)	60Pcs
Net Weight(kg)	1.80
Operating Temperature	-20~50 °C
Storage Temperature	-30°C~ +80°C
IP Rate	67
Estimated Life(Hours)	30,000
Certification	cETLus
Warranty	3-year

Available in custom lengths

Dimensions



Parallel connection is highly recommended as safe electrical operation mode.

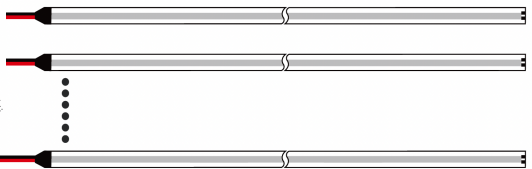

Ordering Guide

Series		Size	LED Type	Color Temperature	Size(Meter)
NH	LED Neon Strip Light	1225	5050	RGBW	1