

Pendant | Zero profile LED Pendant



The LED pendant present a very elegant look with our zero profile anchor



Zero profile, elegant look



Pendant anchor is conspicuous as the the height is too thick



Pendant Housing

Made of durable aluminum construction

Light Engine

Die-cast aluminum material, 8W & 12W available, white & black finish available

Pendant | Zero profile LED Pendant



Key Features

- Die-cast aluminum construction
- **Recessed installation, zero profile, elegant look**
- Dimension: dia. 6 x H20cm
- Driver Input: 120V AC 60Hz
- Color Temperature: 3CCT (3000K/4000K/5000K), adjusting the color temperature from with wall switch
- Beam Angle: 24/38°
- Dimming: TRIAC dimmers 100%-10%
- LED source SDCM<3
- Enjoy the benefits of voltage surge protection, reliable operation in low-temperature environments and longer driver lifetime


Specifications		
Models	HB-PL8W	HB-PL12W
Applications	General lighting	
Wattage	8W	12W
Color Temperature(K)	3CCT 3000/4000/5000	
Delivered Lumen(lm)	650	1000
Halogen Equivalent	60W	100W
Beam Angle	38°	
CRI	>90 (CRI 97 optional)	
Driver Input	120V AC	
Power Factor	0.9	
Dimming	TRIAC dimmers 100%-10%	
Cut out	2-7/8" (72mm)	
Approved Location*	Insulated ceiling, Indoor & Damp location	
Ambient Temperature	-20°C to +40°C	
Air Tight	Yes	
Projected Life	70% light output at 50,000 hours	
Certification	ETL	
Warranty*	5-year limited warranty	

Approved Location*-please contact our sales for outdoor application
Warranty*-refer to Hi-Bright warranty policy



Zero profile, elegant look

Dimensions

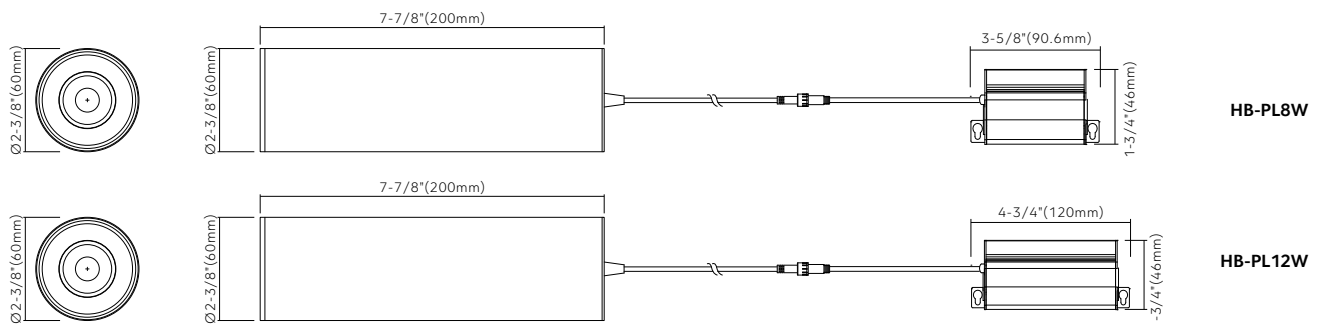

Ordering Guide

Example: HB-PL8W-3CCT-BK

Series	Wattage	Color Temperature	Voltage	Finish
HB-PL LED Pendant	8W	3CCT (3000K/4000K/5000K)	Blank AC 120V	● WH (Matte White) ● BK (Matte Black)
	12W			