


Pendant Zero-profile LED Pendant



Key Features

- Slim zero-profile design for a clean, modern architectural aesthetic — ideal for low-ceiling or minimalist spaces
- Surface-mount installation with an elegant cylindrical form factor (Ø60 mm / 2-3/8")
- Die-cast aluminum construction for exceptional durability, heat dissipation, and long LED life
- Selectable 3CCT color temperature (3000K / 4000K / 5000K), adjustable via wall switch
- High-quality illumination with >90 CRI (CRI 97 optional) and consistent color accuracy (SDCM <3)
- Flexible beam angle options — 24° for focused accent lighting, 38° for general illumination
- Smooth dimming with TRIAC dimmers (100% to 10%)
- Reliable performance with surge protection and stable operation in low-temperature environments
- Long lifetime — engineered for 70% light output at 50,000 hours
- Approved for insulated ceilings, indoor & damp locations
- ETL certified with a 5-year limited warranty

Dimensions

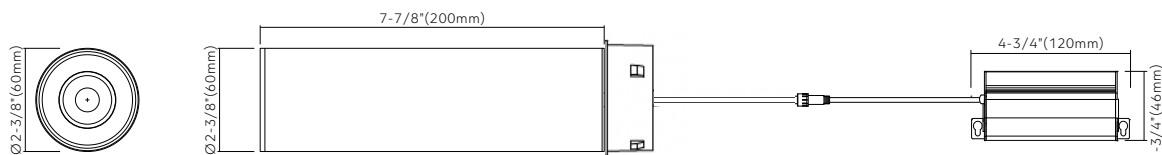

Ordering Guide

Series	Wattage	Color Temperature	Voltage	Finish	Installation
HB-PL LED Pendant	12W	3CCT (3000K/4000K/5000K)	Blank AC 120V	● BK (Matte Black)	S (Surface Mount)

Specifications

Models	HB-PL12W-3CCT-BK-S
Applications	General lighting
Wattage	12W
Color Temperature(K)	3CCT 3000/4000/5000
Delivered Lumen(lm)	1000
Halogen Equivalent	100W
Beam Angle	38°
CRI	>90 (CRI 97 optional)
Driver Input	120V AC
Power Factor	0.9
Dimming	TRIAC dimmers 100%-10%
Cut out	2-7/8" (72mm)
Approved Location*	Insulated ceiling, Indoor & Damp location
Ambient Temperature	-20°C to +40°C
Air Tight	Yes
Projected Life	70% light output at 50,000 hours
Certification	ETL
Warranty*	5-year limited warranty

Approved Location*-please contact our sales for outdoor application
Warranty*-refer to Hi-Bright warranty policy

Installation Trims Options



Ring2-N: Hump-Free Installation Trim



Ring2-C: Installation Trim with Spring Clips



Installation Ring