

Pendant | Zero profile LED Pendant



The LED pendant presents a sleek and elegant appearance with a zero-profile anchor design, offering a modern and seamless lighting solution for residential or commercial interiors



Zero profile, elegant look



Pendant anchor is conspicuous as the the height is too thick

Pendant Housing

Made of durable aluminum construction

Light Engine

Die-cast aluminum material, 8W & 12W available, white & black finish available



Pendant | Zero profile LED Pendant



Key Features

- Made of durable die-cast aluminum for strength and longevity
 - Recessed mounting with zero-profile trim for a clean ceiling appearance
 - Dimension: Ø60 mm (2-3/8")
 - Driver Input: 120V AC 60Hz
 - Color Temperature: 3CCT (3000K/4000K/5000K), adjusting the color temperature from with wall switch
 - Beam Angle: 24/38°
 - Dimming: TRIAC dimmers 100%-10%
 - LED source SDCM<3
- Enjoy the benefits of voltage surge protection, reliable operation in low-temperature environments and longer driver lifetime


Specifications	
Models	HB-PL12W
Applications	General lighting
Wattage	12W
Color Temperature(K)	3CCT 3000/4000/5000
Delivered Lumen(lm)	1000
Halogen Equivalent	100W
Beam Angle	38°
CRI	>90 (CRI 97 optional)
Driver Input	120V AC
Power Factor	0.9
Dimming	TRIAC dimmers 100%-10%
Cut out	2-7/8" (72mm)
Approved Location*	Insulated ceiling, Indoor & Damp location
Ambient Temperature	-20°C to +40°C
Air Tight	Yes
Projected Life	70% light output at 50,000 hours
Certification	ETL
Warranty*	5-year limited warranty

Approved Location*-please contact our sales for outdoor application
Warranty*-refer to Hi-Bright warranty policy



Zero profile, elegant look

Dimensions

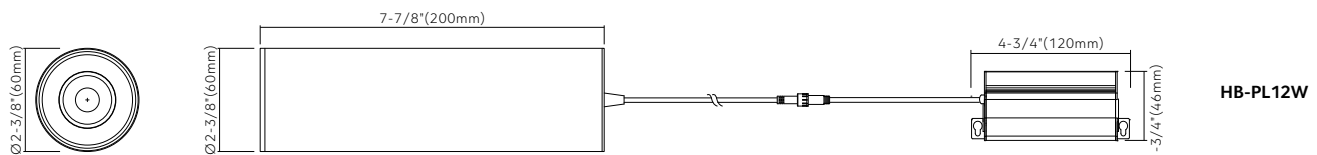

Ordering Guide

Example: HB-PL8W-3CCT-BK

Series	Wattage	Color Temperature	Voltage	Finish
HB-PL LED Pendant	12W	3CCT (3000K/4000K/5000K)	Blank AC 120V	● BK (Matte Black)