

Horizontal & Vertical in One Step Light




Key Features

- The Mini LED step light is designed for installation in indoor/outdoor wall mount applications using standard junction boxes (not supplied)
- Low profile, flush to wall aesthetics with no visible hardware. Balanced lighting, free of shadows with minimum glare
- Direct wiring, Modular integrated driver design allows fixture to be mounted in horizontal or vertical orientation
- **Mounting:** fits into 2"x4" J-Box with minimum inside dimensions of 3"Lx2"Wx2"D
- **Easy installation:** Installs easily in standard gang box
- **Construction:** aluminum faceplate + PMMA diffuser + gasket
- **Faceplate finishes:** available in plated satin nickel or bronze and matte black or white finishes

Specifications	
Models	HB-SLMDV
Applications	Hallways, stairs
Wattage	2.5W
Color Temperature(K)	Single CCT 3000/4000/5000
Lumen Output(lm)	25/45/65
Halogen Equivalent	10W
CRI	80
Driver Input	120V AC
Power Factor	0.9
Dimming	Non dimmable
Approved Location*	Indoor/Outdoor & Wet location
Ambient Temperature	-20°C to +40°C
Air Tight	Yes
Projected Life	70% light output at 50,000 hours
Certification	ETL
Warranty*	5-year

Accessories

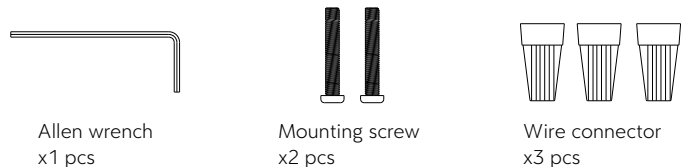

Dimensions



Ordering Guide

Example: HB-SLMDV30KWH

Series	Wattage	Color Temperature	Voltage	Finish
HB-SLMDV Mini Step Light	2.5W	30K (3000K-Single CCT) 40K (4000K-Single CCT) 50K (5000K-Single CCT)	(Blank) 120V only	● WH (White)

* Other finish are available, please contact our sales to make order for special items