


12" Tunable LED Slim Surface



Key Features

- Built-in driver with a slim profile of 13mm thickness
- Sleek LED Flush Mount with rotatable installation
- Color temperature adjustment (2700K, 3500K, 3000K, 4000K, 5000K) facilitated by a slide switch on the backplate
- Utilizes edge-lit technology to achieve a smooth and uniform lighting effect
- Incorporates driver-on-board technology, delimiting the need for a traditional LED driver
- Features a stable structural design for reliable performance


Dimensions

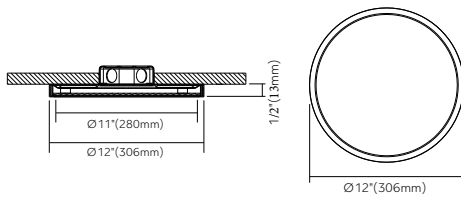

Specifications	
Models	HB-SS12R
Applications	Residential/commercial/office
Wattage	24W
Color Temperature(K)	5CCT (Coming soon) 2700/3000/3500/4000/5000
Delivered Lumen(lm)	1500+10%
Halogen Equivalent	140W
Beam Angle	120°
CRI	>90
Driver Input	120V AC
Power Factor	0.9
Dimming	TRIAC dimming
Approved Location*	Insulated ceiling, Indoor & Damp location
Ambient Temperature	-20°C to +40°C
Air Tight	Yes
Projected Life	70% light output at 50,000 hours
Certification	cETLus
Warranty*	5-year

* Due to continuous improvements and innovations, specifications may change without notice

Installation -(Retrofit -parts sell separately)

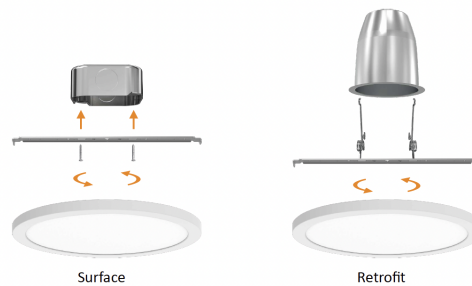

Ordering Guide

Example: HB-SS12R24WCCTWH

Series	Wattage	Color Temperature	Voltage	Finish
HB-SS12R LED Slim Surface -12" Round	24W	5CCT (2700K/3000K/3500K/4000K/5000K)	(Blank) 120V only	● WH (White)

* Other finish are available, please contact our sales to make order for special items