

Ultra Slim LED Puck Light-Reverse CCT



Specifications	
Models	UPR2W
Applications	Under Cabinet
Wattage	2.2W
Color Temperature(K)	Reverse CCT
Delivered Lumen (lm)	3000 or 4000
Halogen Equivalent	15W
Beam Angle	120°
CRI	>90
Driver Input	12V DC/ 24V DC
Power Factor	0.5
Dimming	PWM
Cut out	2-1/4" (56 mm) for recessed mount
Approved Location*	Insulated ceiling, Indoor & Damp Location
Ambient Temperature	-20°C to +40°C
Air Tight	Yes
Projected Life	70% light output at 50,000 hours
Certification	cETLus
Warranty*	5-year limited warranty

Key Features

- **Construction:** plastic body with iron trim ring and PMMA diffuser, with 450mm long naked wire.
- **Slim design:** only 3" diameter with 1/4" thickness.
- **Shape:** round.
- **Easy Installation:** recessed mount & surface mount.
- Requires DC12V/ 24V dimmable driver for operation, sold separately.
- LED source SDCM<5.

* Due to continuous improvements and innovations, specifications may change without notice

Accessories

Round magnetic trim for UPR2W




12V/24V DC dimmable hardwire box





Only **1-1/4"** thickness

Dimensions




Installation




Ultra Slim LED Puck Light-Reverse CCT



Connect with Dimmable Driver

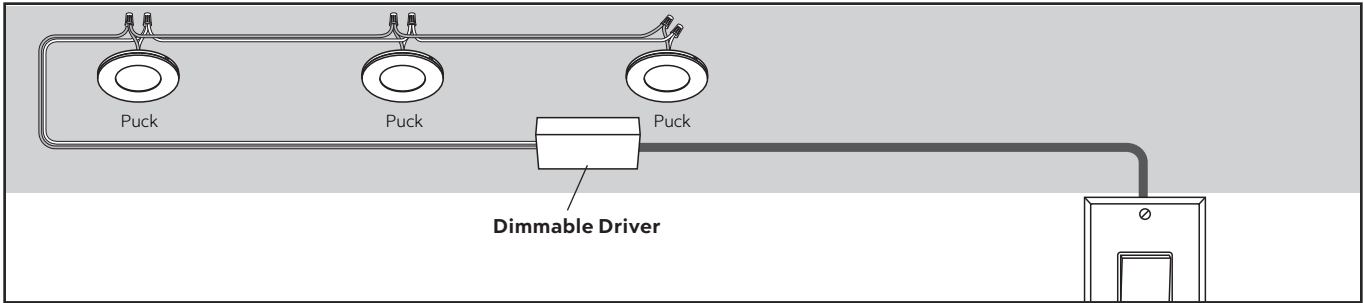

The polarity of the attached wire leads will determine the CCT range selected, it can be switched between 3000K and 4000K. Ensure correct polarity is followed throughout the line

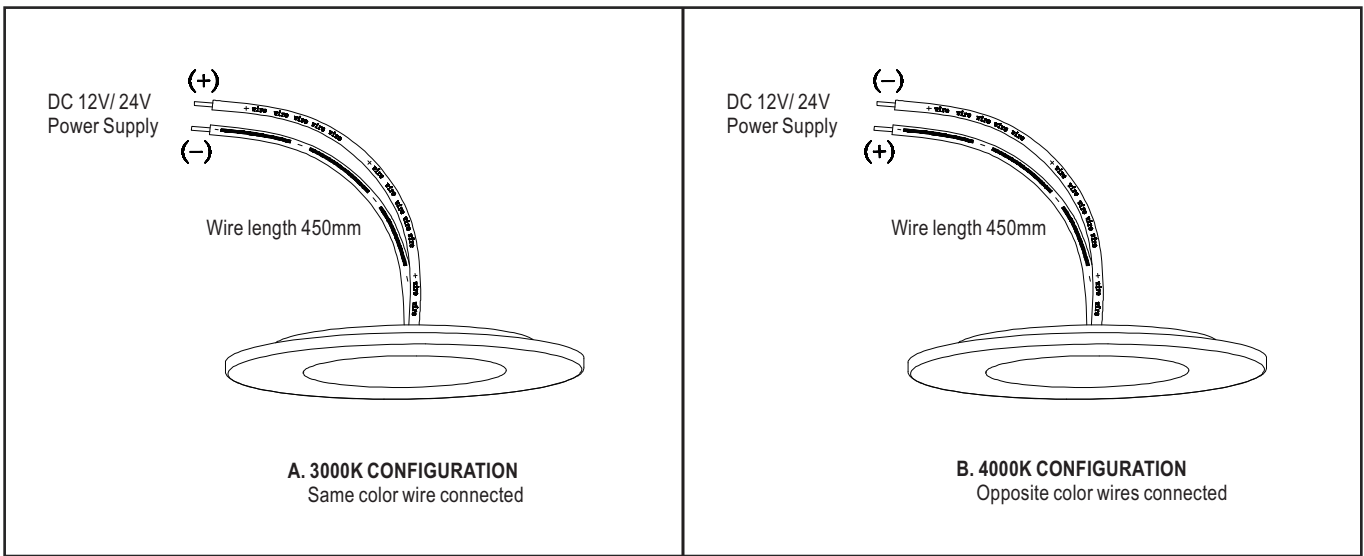

Ordering Guide

Example: UPR2W30K/40K-24V-WH

Series	Wattage	Color Temperature	Voltage	Finish
UPR2W Slim Puck-Round	2.2W	Reverse CCT 3000 or 4000	12V 24V	<ul style="list-style-type: none"> ● WH (White) ● BK (Black)

* Other finishes are available. Please contact our sales team for special orders.