

LED Closet Lights with PIR Motion Sensor



4"



Key Features

- **Construction:** one piece PC formed luminaire. Polycarbonate lens with integrated PIR motion sensor.
- **Mounting:** AC design, it is flat on the back and suitable for installation on or over most standard junction boxes.
- **PIR Motion Sensor:** PIR (passive infrared) motion sensor for easy on/off operation. The sensor activates when motion is detected. After 30 seconds of no motion, the fixture automatically turns off. PIR sensor can detect motion up to 16' diameter away (unobstructed) when mounted at 8'
- **Ratings:** IC rated when used with a electrical junction box rated for direct contact with insulation. Fire rated when used with a fire rated junction box.

Dimensions

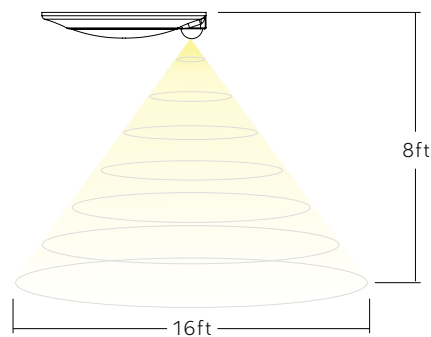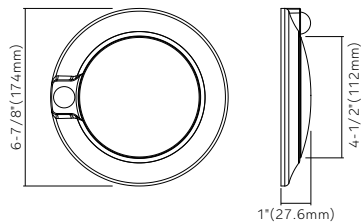

Specifications	
Models	HB-114-CCT
Applications	Residential/commercial/office
Wattage	10W
Color Temperature(K)	3 CCT (Coming soon) 3000/4000/5000
Lumen Output(lm)	600
Halogen Equivalent	60W
Beam Angle	120°
CRI	90
Driver Input	120V AC
Power Factor	0.9
Dimming	Non dimmable
Approved Location*	Insulated ceiling, Indoor & Dry/Wet location
Ambient Temperature	-20°C to +40°C
Air Tight	Yes
Projected Life	70% light output at 50,000 hours
Certification	ETL
Warranty*	Retail: lifetime warranty Project: 5-year warranty

Approved Location*-please contact our sales for outdoor application
Warranty*-refer to Hi-bright warranty policy

Integrated PIR Sensor

The PIR coverage area is a 16' radius from a standard 8' mounting height. The fixture will turn on during occupancy detection and remain on for 30 seconds (customized is available) after vacancy is detected

Ordering Guide

Example: HB-114-CCT

Series	Wattage	Color Temperature	Voltage	Finish
HB-114-CCT Surface Mount PIR -4"	10W	3CCT (3000K/4000K/5000K)	(Blank) 120V only	● WH (White)

* Other finish are available, please contact our sales to make order for special items